


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

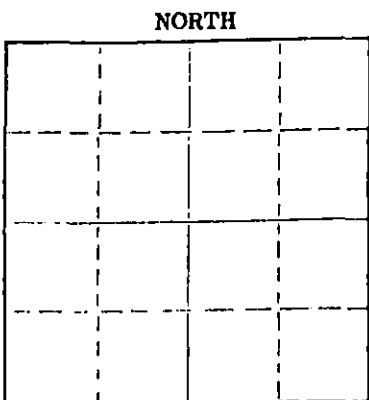

Locate well correctly on above Section Plat

Edwards County, Sec. 19 Twp. 24 Rge. (E) 20 (W)  
 Location as "NE/CNWxSWx" or footage from lines NE SE  
 Lease Owner Sidwell Oil and Gas, Inc.  
 Lease Name Burr Well No. 1  
 Office Address P. O. Box 2475, Pampa, Texas 79065  
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
 Date well completed 11-5 1975  
 Application for plugging filed 11-5 1975  
 Application for plugging approved 11-5 1975  
 Plugging commenced 11-5 1975  
 Plugging completed 11-5 1975  
 Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.  
 If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
 Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4750  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION    | CONTENT | FROM    | TO  | SIZE   | PUT IN | PULLED OUT |
|--------------|---------|---------|-----|--------|--------|------------|
| Surface Hole | Water   | Surface | 368 | 8-5/8" | 360    | None       |
|              |         |         |     |        |        |            |
|              |         |         |     |        |        |            |
|              |         |         |     |        |        |            |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

RECEIVED  
 STATE CORPORATION COMMISSION

Fluid to 350', plug, 35 sx cement;  
 Fluid to 40', plug, 15 sx cement;  
 Two sacks cement in rat hole.

NOV 19 1975

CONSERVATION DIVISION  
 Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
 Name of Plugging Contractor D N B DRILLING, INC.  
 Address 701 First National Building  
 Wichita, Kansas 67202

STATE OF \_\_\_\_\_ COUNTY OF \_\_\_\_\_, ss.  
 JAMES L. DONELSON (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *James L. Donelson*  
 701 First Nat'l Bldg., Wichita, Kansas  
 (Address)

SUBSCRIBED AND SWORN TO before me this 17th day of November 19 75

My commission expires 8-25-76  
 Ella Priess Notary Public.

Ella Priess  
 STATE NOTARY PUBLIC  
 Sedgwick County, Kansas  
 My Com. Expires Aug. 25, 1976

DRILLERS' LOG

SIDWELL OIL & GAS, INC.  
 Burr No. 1  
 NE SE, Sec. 19-24S-20W  
 Edwards County, Kansas

Elev: 2277 K.B.

Commenced: 10-28-75  
 Completed: 11-6-75

Surface Casing: 360' of  
 8-5/8" cemented w/225 sx  
 common cement, 2% Gel, 3% cc.  
 10-28-75

| <u>FORMATION</u>     | <u>DEPTH</u>    |
|----------------------|-----------------|
| Surface Hole         | 0 - 358         |
| Red Bed & Shale      | 368 - 1015      |
| Shale                | 1015 - 1830     |
| Shale & Lime Streaks | 1830 - 2330     |
| Shale                | 2330 - 2785     |
| Shale & Lime         | 2785 - 3000     |
| Lime & Shale         | 3000 - 3240     |
| Shale & Lime         | 3240 - 3465     |
| Lime & Shale         | 3465 - 3870     |
| Shale                | 3870 - 4105     |
| Lime                 | 4105 - 4220     |
| Lime & Shale         | 4220 - 4340     |
| Lime                 | 4340 - 4620     |
| Lime & Shale         | 4620 - 4750 RTD |

RECEIVED  
 STATE CORPORATION COMMISSION

NOV 19 1975

CONSERVATION DIVISION  
 Wichita, Kansas

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B. DRILLING, INC.

*James L. Donelson*  
 JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me this 17th day fo November, 1975.

*Ella Priess*  
 Ella Priess, Notary Public

*Ella Priess*  
 STATE NOTARY PUBLIC  
 Sedgwick County, Kansas  
 My Com. Expires Aug. 25, 1976