

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

Reno County. Sec. 3 Twp 24 Rge. (E) 4 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
Lease Owner Lotus Oil Company
Lease Name Smith Well No. 1
Office Address 900 Land Bank Bldg., Kansas City, Mo.
Character of Well (completed as Oil, Gas or Dry Hole) DRY
Date well completed Jan. 4, 1949 19
Application for plugging filed May 12, 1949 19
Application for plugging approved May 12, 1949 19
Plugging commenced May 11, 1949 19
Plugging completed May 13, 1949 19
Reason for abandonment of well or producing formation DRY HOLE
If a producing well is abandoned, date of last production NONE 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? YES

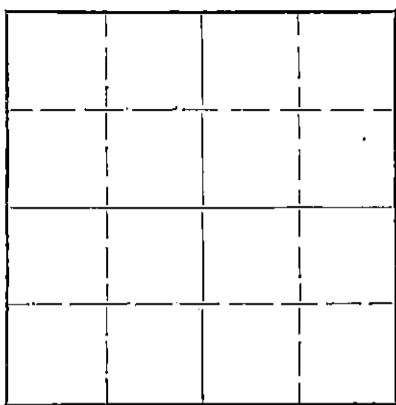

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Depth to top Bottom Total Depth of Well 3300 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Dumped 6 sax cement in bottom of hole. Shot pipe off at 2500 feet. Pulled pipe and mudded hole to 300 feet. Dumped 15 sacks cement at 300 feet. Finished mudding hole and put 5 sacks cement at top of surface.

6-9-49

PLUGGING RECEIVED
Conservation Div.
JUN - 9 1949
STATE CORPORATION COMMISSION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Francis M. Raymond,
Address 202 Bissantz Bldg., Wichita, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Francis M. Raymond (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) Francis M. Raymond

202 Bissantz Bldg., Wichita, Kans. (Address)

SUBSCRIBED AND SWORN to before me this 4th day of JUNE 19 49

Notary Public

My commission expires MAY-18th-1952



C O P Y

The Lotus Oil Company,
900 Land Bank Bldg.,
Kansas City, Mo.

SE/4 Of 3-24S-4W-
Reno County, Kansas.

Smith No. 1.
Total Depth 3300'
Cam. 12/27/48 Completed 1/4/49

Casing 8 5/8" 223' Cemented
5 1/2" 3300' "

C
O
P
Y

Surface Clay & Sand	0	165	
Sand	165	180	
Shale	180	223	run 8 5/8" casing
Shale	223	495	
Gyp & Shale	495	600	
Shale Lime & Shells	600	820	
Lime	820	880	
Shale & Lime	880	1050	
Shale	1050	1235	
Lime & Shale	1235	1350	
Shale	1350	1575	
Lime & Shale	1575	2470	
Lime	2470	2530	
Lime & Shale	2530	2820	
Lime	2820	2900	
Lime & Shale	2900	3227	Top of Chat 3274
Lime	3227	3300	

Total Depth 3300'

PLUGGING
FILE SEC 3-T-24-R-42
BOOK PAGE 96 LINE 16

RECEIVED
Oil & Gas Div.
1949
CORPORATION
COMMISSION
KANSAS