

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

~~FORMATION PLUGGING RECORD~~

Strike out upper line
when reporting plug-
ging of formations.

NORTH

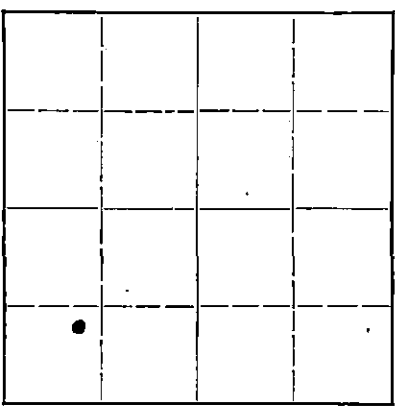

Locate well correctly on above
Section Plat

Reno County Sec. 3 Twp. 24 Rge. (E) 4 (W) 4
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines W/2 SW 1/4, 990' fm Sth, 330' fm East lines
Lease Owner Sinclair Prairie Oil Co
Lease Name Mary Collins Well No. 4
Office Address Box 521, Tulsa, Okla.
Character of Well (completed as Oil, Gas or Dry Hole) Oilwell
Date well completed April 12 19 47
Application for plugging filed Sept. 27, 19 48
Application for plugging approved Sept. 30 19 48
Plugging commenced Oct. 4 19 48
Plugging completed Oct. 9 19 48
Reason for abandonment of well or producing formation Production depleted

If a producing well is abandoned, date of last production Sept 19 48
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee
Producing formation Chat Depth to top 3267 Bottom 3359 Total Depth of Well 3359 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Chat or Miss. Lime	dry	3267	3359	16"OD	389'	0
				7"OD	3272'	2812'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

3359-3272 rock
3272-3240 cement 6sx
3240-390 Mud
390-360 cement 30 sx
360-15' mud
15-0 cement 10 sx

STATE OF KANSAS
OCT 19 1948
10-19-48

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to Mr. E.H. Gibbons
Address Box 774 Great Bend, Kas

STATE OF Kansas, COUNTY OF Barton, ss.
E.H. Gibbons (employee of owner) or owner or operator of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E.H. Gibbons
Box 774, Great Bend, Kas
(Address)

SUBSCRIBED AND SWORN to before me this 18 day of October, 19 48
Jan C. Reasick
Notary Public.

My commission expires April 10 1950

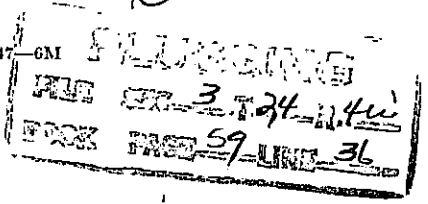

Well Log
Sinclair Prairie Oil Co

Mary Collins # 4
W/2 SW/4, sec. 3-24S-4W Reno Co., Kas
Elev 1471' 990' fm Sth & 330' fm East line.

Drilling begun 3/20/1937
Drilling Completed 4/12/1937
TD 3359' in Chat or Miss. Lime.
Top Miss. Lime 3267'
99oil 60 wtr. after acid.

16"OD 65# csg set at 398' w/380sx
7"OD 24# csg set at 3272' w/
125sx

Drillers Log

Sand	160'
Shale & Sand	385
Red Bed	395
Shale & Shells	1730
Shale	1880
Shale & Lime	2092
Lime-Shale	2250
Lime Shells & Shale	2315
Lime-Shale	2460
Shale & Shells	2545
Lime	2635
Shale & Shells	2712
Lime-KC	2745
Lime-broken	2795
Lime-hard KC	2915
Shale	2979
Lime	3015
Shale	3060
Shale-broken lime	3164
Shale	3260
Shale & Lime	3267
Miss. Lime-Chat	3359 TD

