

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-095-210200000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 25 Twp. 28S Rge. 8W -E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines

C-SE NW
Lease Owner Lifestyle Energy Corporation
Lease Name Henning Well No. 1
Office Address 100 N. Central Expwy, Citizen's Bank-Suite
Character of Well (Completed as Oil, Gas or Dry Hole) Dry Hole 809, Richardson, TX 75080
Date Well completed November 19, 1980
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced November 19, 1980
Plugging completed November 19, 1980
Reason for abandonment of well or producing formation

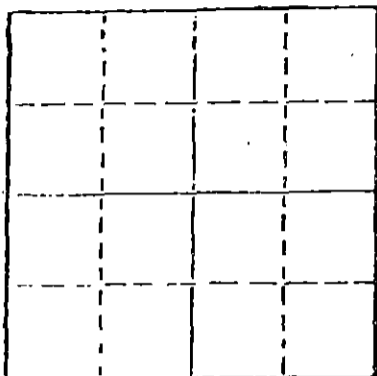

Locate well correctly on above Section Plot

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well William T. Owen
Producing formation Depth to top Bottom Total Depth of Well 4,150'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	264'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 4,150 ft. (rotary total depth) to 260 ft. Set plug at 260 ft. and cemented with 40 sacks cement. Filled hole with heavy rotary mud from 260 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Allied Oil Well cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Allied Cementing Co., Inc.
Box 31, Russell, Kansas 67665

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent (Signature of owner, operator or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
251 N. Water - Suite 10, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of December, 1980

My commission expires July 25, 1982
Elsie Willison - Notary Public.

