

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-095-21,498-00-00

LEASE NAME Woodson

WELL NUMBER 1-8

SPOT LOCATION C SW NE

SEC. 8 TWP. 29 RGE. 7 (E) or (W)

COUNTY Kingman

Date Well Completed 11-17-84

Plugging Commenced 11-18-84

Plugging Completed 11-18-84

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR Texas Energies, Inc.

ADDRESS P. O. Box 947, Pratt, Kansas 67124

PHONE # (316) 672-7581 OPERATORS LICENSE NO. 5087

Character of Well D&A
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? Wichita, Kansas

Is ACO-1 filed? Yes If not, is well log attached? _____

Producing formation _____ Depth to top _____ bottom _____ T.D. 4620

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from feet to feet each set. Well was plugged with 100 sxs 60/40 poz, 3% cc as follows: 1000'-35 sxs; 350'-35 sxs; 40'-solid bridge with 10 sxs; rathole-15 sxs; water well-5 sxs. Job by Halliburton. Plug down at 8:30 a.m. on November 18, 1984.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Wheatstate Oilfield Services, Inc. License No. 5149

Address P. O. Box 329, Pratt, Kansas 67124


RECEIVED
STATE CORPORATION COMMISSION

STATE OF Kansas COUNTY OF Pratt, ss.

James A. Easter (employee of operator) or (operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) James A. Easter


(Address) P. O. Box 329, Pratt, Kansas 67124



SUBSCRIBED AND SWORN TO before me this 9 day of January 1985

Mary L. Tjaden
Notary Public

My Commission expires: 3/22/88

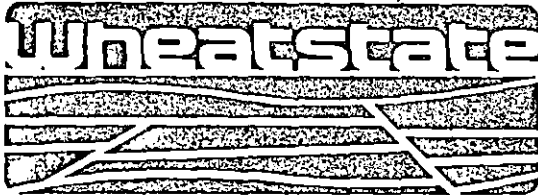

15-095-21498-00-00

- Rotary Drilling
- Drilling Mud and Chemicals
- Heavy Oil Field Hauling
- Rodstabout and Dirt Services
- Well Completion and Servicing Units

Oilfield Services, Inc.

DRILLER'S WELL LOG

Woodson #1-8
 C SW NE Sec. 8-29S-7W
 Kingman County, Kansas
 Commenced: 11-8-84
 Completed: 11-18-84
 API #15-095-21,498
 Operator: Texas Energies, Inc.

Depth		Formation	Remarks
From	To		
0	314	Surface	Ran 7 joints (292') new, 23#, 8 5/8" surface casing. Set at 301' with 75 sxs Lite, 3% cc, 100 sxs Common, 2% gel, 3% cc. Job by Halliburton. Cement did circulate. Plug down at 10:30 p.m. on November 8, 1984.
314	1148	Shale	
1148	4620	Lime, Shale T.D.	
			RTD 4620'
			Well was plugged with 100 sxs 60/40 poz, 3% cc as follows: 1000'-35 sxs; 350'-35 sxs; 40'-solid bridge with 10 sxs; rathole-15 sxs; water well-5 sxs. Job by Halliburton, ticket #995126. Plug down at 8:30 a.m. on November 18, 1984. State Plugger was out of the Wichita, Kansas office.

STATE OF KANSAS)
) ss
 COUNTY OF PRATT)

I, the undersigned, being duly sworn on oath, state that the above Driller's Log is true and correct to the best of my knowledge and belief and according to the records of this office.

WHEATSTATE OILFIELD SERVICES, INC.
 RECEIVED
 STATE CORPORATION COMMISSION
 ARNIE LITTLE, VICE-PRESIDENT
 JAN 10 1985

NOTARY PUBLIC - State of Kansas
 MARY L. TJADEN
 My Appt. Exp. 3/22/88

COMPLETION DIVISION
 Wichita, Kansas
 NOTARY PUBLIC

My Commission Expires:
 3/22/88