


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Kingman County, Sec. 12 Twp. 29 Rge. (E) 7 (W)

Location as "NE/CNW%SW%" or footage from lines SE SE
Lease Owner Murfin Drilling Co. - Petroleum, Inc.
Lease Name Mary Rogers Well No. 1
Office Address 617 Union Center, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 2 1959
Application for plugging filed May 2 1959
Application for plugging approved May 2 1959
Plugging commenced May 2 1959
Plugging completed May 2 1959
Reason for abandonment of well or producing formation Dry Hole

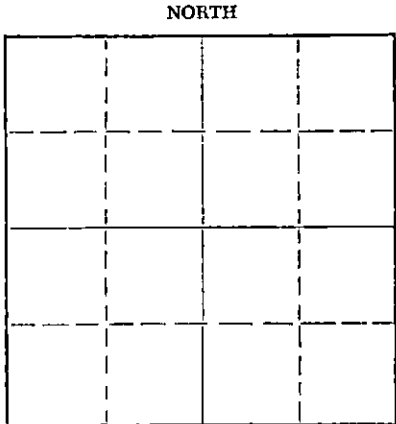

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel, Pretty Prairie, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4580 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	233'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with mud to 240'. Set 1st plug at 240'. Displaced 1/4 sxs. hulls and 18 sxs. cement. Filled hole to 35'. Displaced 10 sxs. cement.

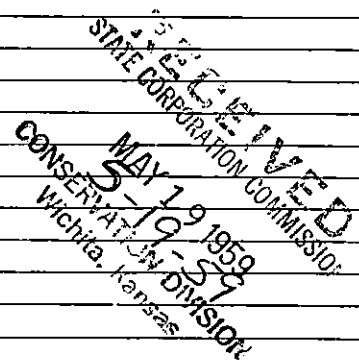


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Murfin Drilling Company
Address 617 Union Center, Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
W. R. Murfin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) WR Murfin
617 Union Center, Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 12th day of May, 1959

My commission expires March 23, 1960
Donna M. Matzek
Donna M. Matzek Notary Public.

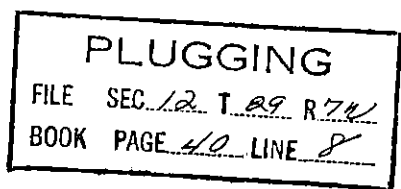


15-095-00371-00-00
WELL LOG

COMPANY **Murfin Drilling Company -
Petroleum, Inc.**
FARM **Mary Rogers** NO.

SEC. **12** T. **29** R. **7W**
LOC. **SE SE**

TOTAL DEPTH **4580'**
COMM. **4-13-59** COMP. **5-2-59**
SHOT OR TREATED
CONTRACTOR **Murfin Drilling Company**
ISSUED

COUNTY **Kingman
KANSAS**



CASING
20 10
15 8 5/8" @ 233' w/200 SXS.
12 6
13 5

ELEVATION **1592' K. B.**
PRODUCTION **D & A**

FIGURES INDICATE BOTTOM OF FORMATIONS

233 Red Bed - Shells
470 Red Bed
650 Shells - Shale
1250 Shale - Lime
1405 Salt - Shells
1450 Shells - Shale
1700 Lime - Shale
1775 Lime
1825 Shale - Lime
2000 Shale
2080 Lime - Shale
2285 Shale
3090 Lime - Shale
3210 Shale - Sand - Lime
3290 Sand - Shale
3390 Lime - Shale
3850 Lime
3950 Lime - Shale
4032 Lime
4150 Lime - Shale
4415 Lime
4490 Lime - Shale
4520 Shale - Sand - Lime
4545 Lime
4570 Lime - Sand
4580 Sand

ELECTRIC LOG TOPS:

Heebner	3078
Toronto	3092
Douglas	3206
Lansing	3326
Base Kansas City	3822
Cherokee	3986
Mississippi	4124
Kinderhook	4424
Viola	4524
Simpson	4546

DST #1 4128-50

Gas to Surface 9 min. Good Blow.
Rec. 120' slightly gassy mud, 180'
muddy salt water. IF 240#. FF 250#.
BHP 1420#/ 20 min.

RECEIVED
STATE CORPORATION COMMISSION
MAY 19 1959
CONSERVATION DIVISION
Wichita, Kansas

PLUGGING
FILE SEC. 12 T. 29 R. 7W
BOOK PAGE 40 LINE 8

State of Kansas
County of Sedgwick } ss:

I, W. R. Murfin of the Murfin Drilling Company
upon oath state that the above and foregoing is a true and correct copy of the log of the Mary Rogers #1 well.

WR Murfin

Subscribed and sworn to before me this 12th day of May 19 59

My Commission Expires: March 23, 1960

Donna M. Matzke
Donna M. Matzke PUBLIC