


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

Form CP-4  
15-095-20243-000

WELL PLUGGING RECORD

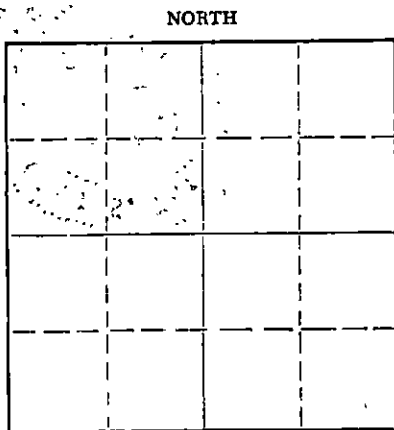

Locate well correctly on above  
Section Plat

Kingman County. Sec. 35 Twp. 29S Rge. 6 (E) 6 (W)  
Location as "NE/CNW%SW%" or footage from lines C SE NW  
Lease Owner Oasis Petroleum, Inc.  
Lease Name Gillett Well No. 1  
Office Address 800 Sutton Place, Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed March 14, 1971 1971  
Application for plugging filed March 14 1971  
Application for plugging approved March 14 1971  
Plugging commenced March 14 1971  
Plugging completed March 14 1971  
Reason for abandonment of well or producing formation \_\_\_\_\_

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Russell Biberstein  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4125 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	287'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with mud to 265', 1/2 sack hulls, plug, 30 sacks cement;  
filled hole with mud to 40', 1/2 sack hulls, plug, 10 sacks cement.  
2 sacks cement in rat hole. Completed @ 11:00 a.m. 3-14-71.

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 18 1971  
CONSERVATION DIVISION  
Wichita, Kansas  
RWD 03-18-71


(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Gabbert-Jones, Inc.  
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.  
Elbie G. McNeil (employee of owner) or ~~(owner or operator)~~ of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Elbie G. McNeil  
Elbie G. McNeil  
800 Sutton Place, Wichita, Kansas 67202  
(Address)

Subscribed and sworn to before me this 17th day of March, 1971.

Jean S. Taylor  
Jean S. Taylor Notary Public.



My commission expires June 28, 1974.

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

RECEIVED  
STATE CORPORATION COMMISSION  
MAR 18 1971  
CONSERVATION DIVISION  
Wichita, Kansas


GILLETT #1  
C SE NW Section 35-29S-6W  
Kingman County, Kansas

Commenced: March 4, 1971  
Completed: March 14, 1971

OPERATOR - Oasis Petroleum, Inc.

DEPTH	FORMATION	REMARKS
From To		
0 40	Surface clay	
40 289	Shale, shells, red bed	Ran 8 joints of 8-5/8" casing, set @ 287' w/250 sacks cement.
289 660	Red bed, shale	
660 1220	Shale and shells	
1220 4125	Shale and lime	
4125 TD		Dry and abandoned.

I, JAMES S. SUTTON, II, certify this is a correct copy of the Drillers' Log for the well drilled in the C SE NW Section 35-29S-6W, Kingman County, Kansas, to the best of my knowledge and belief.


  
JAMES S. SUTTON, II

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK )

Before me, the undersigned, a Notary Public within and for said County and State, on this 16 day of March, 1971, personally appeared James S. Sutton, II, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires February 1, 1972

  
Barbara J. Layton, Notary Public

