

State of Kansas



FORM CP-2

15-155-20847-0000

JOHN CARLIN
R. C. LOUX
JANE T. ROY
PHILLIP A. DICK
CAROL J. LARSON

Governor
Chairman
Commissioner
Commissioner
Executive Secretary

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
245 North Water
WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To be filed by Plugging Agent)

Dear Sir:

Mr. Maurice Schreck of Rosencrantz-Bemis Drilling has this date requested permission to plug the following described well:

Operator's Full Name: Western Drilling and Exploration

Complete Address: 439 Wheatland Pl., Wichita, Kansas

Lease Name: Graber Well No. 6

Location: 110' E. OF NW NE NW Sec. 34 Twp. 23 Rge. 4 (E) (W)

County: Reno Total Depth: 592'

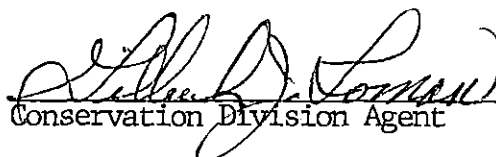
Abandoned Oil Well Gas Well Input Well SWD Well D&A

Other well as hereafter indicated: Lost Hole (Sink Hole)

Mr. Schreck was instructed to plug the well as follows:

No Surface casing. Set 48" conductor pipe. Back Fill hole to conductor pipe. Drill hole (clean out 12 1/4" hole) to 135'. Set 131' of 8 3/8" casing and circulate with cement. Drill hole to 178'. Try to pump into hole. Squeeze hole with 200 sacks common cement with 3% c.c. added.

Very truly yours,


Conservation Division Agent