

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Reno County. Sec. 34 Twp. 23 Rge. 4 (E) (W)
Location as "NE/CNW/SW" or footage from lines NE C SE

Lease Owner Fred J. Avesh

Lease Name McElwain Well No. 1

Office Address Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole)

Date well completed 19

Application for plugging filed 19

Application for plugging approved 19


Plugging commenced 7/24/67 19

Plugging completed 7/27/67 19

Reason for abandonment of well or producing formation depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

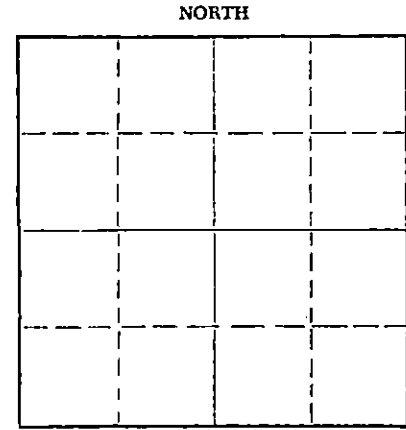

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Toman

Producing formation Depth to top Bottom Total Depth of Well 3593 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				15-1/2	167'	none
				12-1/2	567'	none
				5-1/2	3570'	2487'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fished and pulled rods, pulled tubing. Ran sand to 3550', cleaned cellar.
Set 5 sacks of cement. Shot pipe at 2791', 2693', 2595', 2498', set rock bridge at 300' and ran 30 sacks of cement. Mudded hole to 40', set rock bridge and ran 15 sacks of cement. Tallied pipe.

PLUGGING COMPLETE.

STATE CORPORATION COMMISSION
SEP 20 1967
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY

Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.

NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight

CHASE, KANSAS (Address)

SUBSCRIBED AND SWORN to before me this 28th day of July, 1967

Margaret Melcher Notary Public.

My commission expires February 15, 1971.