


Give All Information Completely
Make Required Affidavits
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
111 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

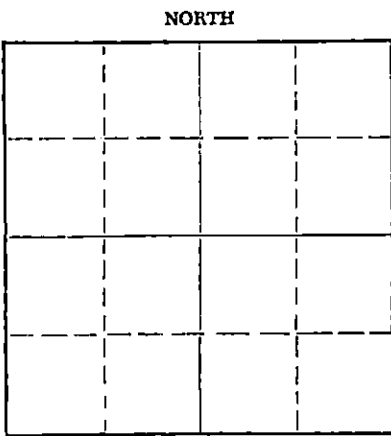

Locate well correctly on above Section Plat

Kingman County, Sec. 30 Twp. 29S Rge. (E) 5 (W)
Location as "NE/CNW/SW" or footage from lines NW SW NE
Lease Owner Rieman S. Webb
Lease Name Graber #1 Well No.
Office Address 300 North Ridgwood
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 9-22-62 19
Application for plugging filed 9-25-62 19
Application for plugging approved 9-22-62 19
Plugging commenced 9-22-62 19
Plugging completed 9-22-62 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel, Pretty Prairie, Kansas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 1480 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	248'	8 5/8"	9-9-62	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy drilling mud to 244'. Howco Plug and 1/2 sack of hulls set at 244' with 20 sacks of cement. Filled with heavy drilling mud to 35', 1/4 sack of hulls, plug set with 8 sacksof cement. 2 sacks of cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

09-26-62 SEP 26 1962
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor D & D Drilling Company, Inc.
Address 308 Schweiter Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Glenn M. Dunne, Jr. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Glenn M. Dunne, Jr.
308 Schweiter Building, Wichita, Kansas.
(Address)

SUBSCRIBED AND SWORN TO before me this 25th day of September, 1962

Colleen Chapple
Notary Public.

My commission expires 11-18-62



15-095-01499-00-00

ROTARY DRILLING LOG

OPERATOR: Nicman S. Webb
CONTRACTOR: D & D Drilling Company, Inc.
WELL: Graber #1
NW SW NE Sec. 30-29S-5W
Kingman County, Kansas

COM: 9-9-62
COMP: 9-22-62

FORMATIONS:

REMARKS:

Sand & Red Bed	225'
Shale	248'
Red Bed & Shale	500'
Shale	1193'
Anhy.	1220'
Shale	1357'
Shale & Lime	1718'
Lime & Shale	1960'
Shale & Shells	2250'
Shale & Lime	2387'
Shale & Shells	2610'
Lime & Shale	3515'
Lime	3828'
Lime & Shale	3866'
Lime & Shale	3955'
Lime & Shale Strks.	4020'
Lime & Shale	4080'
Shale & Lime	4083'
Lime & Chert	4203'
Miss. Lime	4345'
Shale	4400'
Shale & Lime	4438'
Lime	4480'
Rotary Total Depth	4480'

Set 5 joints of 8 5/8" surface casing at 248', cemented with 200 sacks of Sunset cement.

RECEIVED
STATE CONSERVATION COMMISSION

SEP 20 1962

CONSERVATION DIVISION
Wichita, Kansas

A F F I D A V I T

STATE OF KANSAS)
) ss
COUNTY OF SEDGWICK)

Glenn M. Dunne, Jr. of lawful age, being duly and solemnly sworn on oath says: I am a resident of Wichita, Sedgwick County, Kansas, and I hereby know and on oath state, that the above drilling log covering the Graber No. 1, located in the NW SW NE of Section 30-29S-5W, Kingman County, Kansas, is true and correct to the best of my knowledge and belief. Further affiant saith not.

D & D DRILLING COMPANY, INC.

BY: Glenn M. Dunne, Jr.
Glenn M. Dunne, Jr.

Subscribed and sworn to before me this 25th day of September, 1962.

My Commission Expires November 18, 1962

Colleen Chapple
Colleen Chapple