


15-095-20300-0000
WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

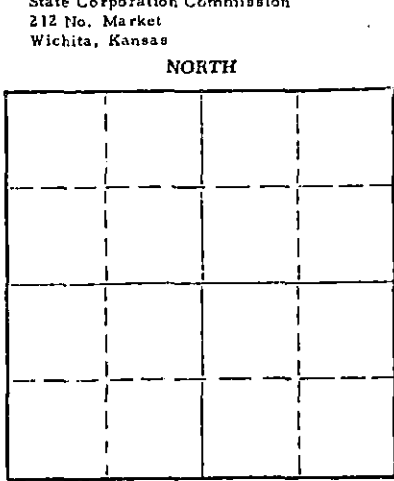

Locate well correctly on above
Section Plat

Kingman County, Sec. 18 Twp. 29S Rge. (E) 8 (W)
Location as "NE/CNW/SW" or footage from lines 2310' FN&EL
Lease Owner Anadarko Production Company
Lease Name Rohlman "A" Well No. 1
Office Address Box 351, Liberal, Kansas 67901
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed May 15 19 73
Application for plugging filed Verbal approval, May 21 19 73
Application for plugging approved 19
Plugging commenced May 21 19 73
Plugging completed May 23 19 73
Reason for abandonment of well or producing formation Dry
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4174 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	254'	None
				4-1/2	4150'	3720'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pumped plug to 4000'. Shot 4-1/2" casing @ 3817' & 3720', free @ 3720'.
Pulled 4-1/2" casing to 260'. Spotted 40 sacks cement 260' to 160'.
Filled hole w/mud to 40', spotted 10 sacks cement 40' to 0'. Cut off
8-5/8" casing 4' below GL & welded on steel plate.

RECEIVED
STATE CORPORATION COMMISSION
JUN 5 1973
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Sargent's Casing Pulling Service
Address Box 506, Liberal, Kansas 67901


STATE OF KANSAS, COUNTY OF SEWARD, ss.
T. W. Williams (employee of owner) or (owner/lessee) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) T. W. Williams
T. W. Williams
Box 351, Liberal, Kansas 67901
(Address)

SUBSCRIBED AND SWORN to before me this 1st day of June, 1973

Norma Jean Tucker
Notary Public.

My commission expires _____



DRILLER'S LOG

WELL NAME Rohlman "A" #1 COMPANY OPERATING Anadarko Production Company
 ADDRESS OF COMPANY Box 351, Liberal, Kansas

WELL LOCATION 1/4 1/4 1/4
2310 Ft. ~~Rocky Mountain~~, from North Line
2310 Ft. ~~Rocky Mountain~~, Sec. 18, Twp. 29S, Rge. 8W, Kingman County, Kansas
 from East Line

DRILLING STARTED 4-20, 19 73, DRILLING COMPLETED 5-2, 19 73
 WELL COMPLETED 5-23, 19 73, WELL CONNECTED _____, 19 _____

ELEVATION 1661 Ft. Ground Level CHARACTER of WELL (Oil, Gas, Dry Hole) Dry Hole

OIL OR GAS SANDS OR ZONES - PERFORATIONS - ACIDIZING AND FRACTURING INFORMATION.					
Name	From	To	No. of Shots	Gallons Used	Kind Used
Mississippian	4150	4159	open hole	Acid w/500 gals	MOD 202
"	4150	4169	" "	Acid w/500 gals	15% NE

CASING RECORD

Size	Amount Set	Sacks of Cement	Amount Pulled
8-5/8"	254'	300	None
4-1/2"	4150'	115	3720'
2-3/8" tubing, set @	4147'	SN @ 4131'	4147'

FORMATION RECORD

Formation	Top	Bottom	Formation	Top	Bottom
Sand	0	60			
Red bed & shale	60	1150			
Shale & lime	1150	3653			
Lime	3653	4174			
Total Depth	4174				

RECEIVED
 STATE CORPORATION COMMISSION
 OCT 12 1973
 CONSERVATION DIVISION
 Wichita, Kansas

RESULTS OF INITIAL PRODUCTION TEST: _____

