

STATE OF KANSAS
STATE CORPORATION COMMISSION

15-095-20512-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 23 Twp. 29S Rge. 8W
Location as "NE/CNW/SW" or footage from lines
C - SW NE

Lease Owner Keener Oil Company
Lease Name Iantha Young Well No. 1

Office Address 406 Nat. Bank of Tulsa Bldg., Tulsa, Okla
Character of Well (Completed as Oil, Gas or Dry Hole)


Dry Hole

Date Well completed September 25, 1976
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced September 25, 1976
Plugging completed September 25, 1976
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation Depth to top Bottom Total Depth of Well 4212'
Show depth and thickness of all water, oil and gas formations.

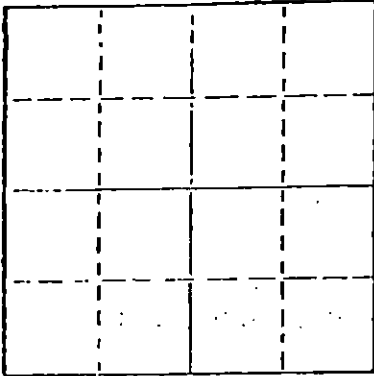

Locate well correctly on above Section Plot

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	202'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 4,212 ft. (rotary total depth) to 190 ft. Set plug at 190 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 190 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 15 sacks cement, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well Cementing pump truck through 4 1/2 inch drill pipe.

OCT 01 1976

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services CONSERVATION DIVISION
410 Union Center Bldg., Wichita, Kansas 67202


STATE OF Kansas COUNTY OF Sedgwick ss.

I, Mark Britting, Agent (Name of owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Mark Britting
200 No. Main, Wichita, Kansas 67202 (Address)

Subscribed and Sworn to before me this 30th day of September, 1976

My commission expires June 30, 1978
Elsie Willison Notary Public



KANSAS GEOLOGICAL SOCIETY API NO. - 15-095-20,512
 KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
 KANSAS GEOLOGICAL SOCIETY BUILDING
 508 EAST MURDOCK - WICHITA, KANSAS


COMPANY Keener Oil Company

SEC. 23 T. 29S R. 8W
 LOC. C - SW NE

FARM Iantha Young NO. 1

COUNTY Kingman

TOTAL DEPTH 4,212'
 COMM. September 14, 1976 COMP. September 25, 1976
 SHOT OR TREATED
 CONTRACTOR H-30, Inc.
 ISSUED September 30, 1976



CASING

20	10	
15	8-5/8"	202' cemented w/225 sxs cement ELEVATION 1938 KB.
12	6	
13	5	

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Shale	400'
Shale and Lime	1,295'
Shale w/Lime Streaks	1,460'
Shale and Lime	1,770'
Lime and Shale	1,950'
Shale and Lime	2,083'
Lime and Shale	2,200'
Shale and Lime	2,435'
Lime	2,592'
Lime and Shale	2,690'
Shale and Lime	2,880'
Lime	3,053'
Lime and Shale	3,228'
Shale and Lime	3,480'
Lime	4,168'
Shale and Lime	4,189'
Mississippi	4,212'
Rotary Total Depth	4,212'

RECEIVED
 STATE CORPORATION COMMISSION

OCT 01 1976

CONSERVATION DIVISION
 Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.


Merle Britting
 Merle Britting

State of Kansas }
 County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public

and for said county and state this 30th. day

of September, 1976.



Elsie Willison
 Elsie Willison -Notary Public

My Commission Expires:

June 30, 1978