

Corp. Commission

15-095 01850000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Kingman

County. Sec. 19 Twp. 29S Rge. 6W (E) (W)

Location as "NE/CNW/SW" or footage from lines 1980 S and 660 E of NW corner

Lease Owner Phillips Petr. Co.

Lease Name Osborn-A Well No. 1

Office Address Box 287, Gt. Bend, Kan

Character of Well (completed as Oil, Gas or Dry Hole) Gas

Date well completed November 1963 19

Application for plugging filed 7-1-66 19

Application for plugging approved 7-5-66 19


Plugging commenced 7-11-66 19

Plugging completed 7-15-66 19

Reason for abandonment of well or producing formation depleted

If a producing well is abandoned, date of last production May 1966 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

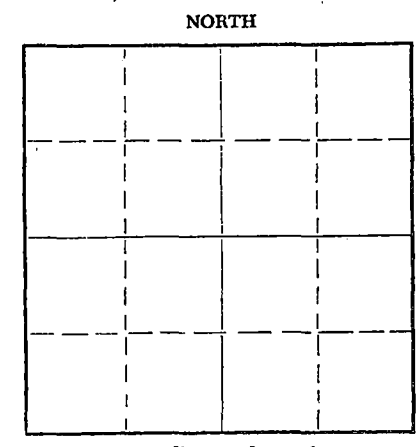

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well A Elving, Pratt, Kan 4175 Max TD

Producing formation miss Depth to top 4110 Bottom Present Total Depth of Well 4136 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|-------|--------|------------|
| | | | | 8-5/8 | 328 | none |
| | | | | 4 1/2 | 4174 | 3110 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PB with sand 4136 to 3700'. Working 4 1/2 csg; found top of sand at 3595, dumped 3 sx cement to 3559'; installed head, shot 4 1/2 at 3530 unable to pull. Shot off at 3420, pulled pipe. Mudded hole 3559 to 300', rock bridge 300 to 290, 25 sx cement to 190. Mud 190 to 40', rock bridge 40 to 30', 10 sx cement to surface. Well P&A 8 am 7-15-66.

RECEIVED
STATE CORPORATION COMMISSION

JUL 19 1966

07-19-66

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Knight Casing Pulling Co.

Address Chase, Kan

STATE OF Kansas, COUNTY OF Barton, ss.
A Slagle, Dist. Supt. (employee of owner) or Conservator of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) A. T. Slagle

Box 287, Gt. Bend, Kan (Address)

SUBSCRIBED AND SWORN TO before me this 19th day of July, 19 66

Lura Lee Parks Notary Public.

My commission expires 10-27-69

EXPLORATION RECORD

15-095-01850-0000

Lease Osborn-A

Well 1

| Formation Name | Top | Base | Remarks |
|---------------------|-----|------|---------|
| Sand | | 60 | |
| Sand and red bed | | 90 | |
| Red bed | | 329 | |
| Shale | | 1035 | |
| Anhydrite | | 1055 | |
| Shale and shells | | 1320 | |
| Lime and shale | | 1570 | |
| Lime | | 1890 | |
| Shale and lime stks | | 2430 | |
| Lime and shale | | 2620 | |
| Shale and lime | | 2780 | |
| Lime and shale | | 3205 | |
| Shale and lime | | 3234 | |
| Lime and shale | | 3334 | |
| Lime | | 3970 | |
| Lime and shale | | 4038 | |
| Shale and lime | | 4109 | |
| Chert | | 4119 | |
| Mississippi | | 4175 | |

RECEIVED
 STATE CORPORATION COMMISSION
 JUL 19 1966
 CONSERVATION DIVISION
 Wichita, Kansas