STATE OF KANSAS
STATE CORPORATION COMMISSION


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Form CP-4

15.063.00096.00.00

WELL PLUGGING RECORD

NORTH

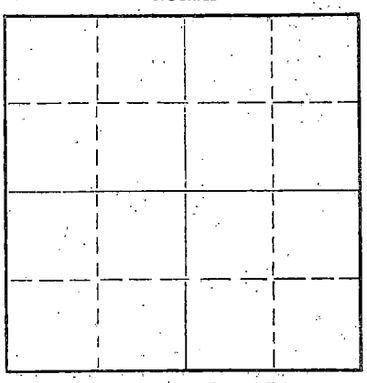

Locate well correctly on above Section Plat

GOVE County. Sec. 34 Twp. 14 Rge. 31 (E) W (W)

Location as "NE/CNW¼SW¼" or footage from lines C SW SW

Lease Owner PLACID OIL COMPANY

Lease Name THIES Well No. 1

Office Address 600 Beck Building Shreveport, Louisiana

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed October 9 19 63

Application for plugging filed October 9 19 63

Application for plugging approved October 9 (verbally) 19 63

Plugging commenced October 9 19 63

Plugging completed October 9 19 63

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well

Producing formation Depth to top Bottom Total Depth of Well 4587 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface		0	314'	8 5/8"	314'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud from total depth to 550' with a plug and 20 sacks of cement at this point. Heavy mud to 300' with a plug and 20 sacks of cement at this point. Heavy mud to 40' with a plug and 10 sacks of cement at this point.

10-30-63

RECEIVED
STATE CORPORATION COMMISSION

OCT 30 1963

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Harms Drilling Company

Address P.O. Box 488 Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.

ALLAN HARMS (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Allan Harms

P.O. Box 488 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of October, 19 63

Helen E. Gearhart
Helen E. Gearhart Notary Public.

My commission expires January 22, 1966

D R I L L E R S L O G

COMPANY: PLACID OIL COMPANY — C SW SW SECTION 34-14S-31W
FARM: THLES #1 — GOVE COUNTY, KANSAS
COMMENCED: SEPTEMBER 24, 1963 — COMPLETED: OCTOBER 9, 1963

ELEVATION: 2624 KB

---

0 - 850	shale
850 - 1300	shale-sand
1300 - 1425	sand & shale
1425 - 1490	hard sand & shale
1490 - 1950	red bed & shale
1950 - 2250	shale - shells
2250 - 2390	red bed-shale
2390 - 2640	shale-lime
2640 - 2720	lime-shale
2720 - 2910	shale-lime
2910 - 3030	lime-shale
3030 - 3110	lime-shale-hard sand
3110 - 3140	hard sand
3140 - 3175	shale-lime
3175 - 3690	lime-shale
3690 - 4195	lime
4195 - 4227	hard lime
4227 - 4326	lime
4326 - 4475	Mississippi
4475 - 4491	Cored
4491 - 4508	Mississippi
4508 - 4533	Cored
4533 - 4587	Mississippi
4587	Total depth

SET 314' of 8 5/8 inch surface casing. Cemented with 250 sacks of common cement with 2% calcium chloride.

RAN electric log

DRY, plugged and abandoned

RECEIVED
STATE CORPORATION COMMISSION
OCT 30 1963
CONSERVATION DIVISION
Wichita, Kansas

A F F I D A V I T

STATE OF KANSAS)
) SS
COUNTY OF BARTON)

I, Allan Harms of the Harms Drilling Company being first duly sworn on oath state: I have knowledge of the facts, statements and matters herein contained and the same are true and correct.

Allan Harms

Subscribed and sworn to before me this 29th day of October, 1963

Helen E. Gearhart Notary Public

My commission expires January 22, 1966.