


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

OR FORMATION PLUGGING RECORD

Strike out upper line
when reporting plugging
off formations.



Locate well correctly on above Section Plat

Reno County. Sec. 10 Twp. 23 Rge. 10 (E) (W)
 Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SW NE SE
 Lease Owner. Carter Oil Co.
 Lease Name. Mable McMurry Well No. 3
 Office Address. Tulsa, Oklahoma
 Character of Well (completed as Oil, Gas or Dry Hole) Oil
 Date well completed. 8-3 19.42
 Application for plugging filed. 12-18 19.47
 Application for plugging approved. 12-22 19.47
 Plugging commenced. February 10 19.48
 Plugging completed. February 28 19.48
 Reason for abandonment of well or producing formation. Ceased to be profitable producer
 If a producing well is abandoned, date of last production. 12-1 19.47
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes


Name of Conservation Agent who supervised plugging of this well. Ruel Durkee
 Producing formation. Viola Depth to top. 3753' Bottom. 3759' Total Depth of Well. 3762' Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Viola	Oil	3753'	3759'	8 5/8"	305'	--
				5 1/2"	3375'	2791'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped 6 sacks of cement at 3375' and filled up to 3340'. Shot pipe loose at 2791'. Pulled pipe, mudded hole from 2791' to 300'.
 Dumped 15 sacks of cement at 300'; filled up to 280'.
 Finished filling surface pipe with mud from 280' to 10' of top of surface and finished top of surface with 5 sacks of cement.

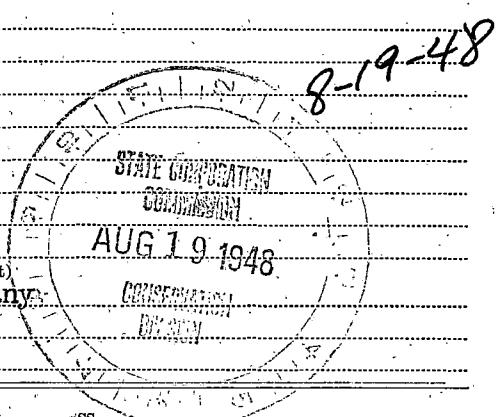

(If additional description is necessary, use BACK of this sheet)
 Correspondence regarding this well should be addressed to. The Carter Oil Company
 Address. Box 786, Great Bend, Kansas


STATE OF Kansas, COUNTY OF Barton, ss.
W. D. Maxwell (employee of owner) or (owner or operator) of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. D. Maxwell - Dist. Supt.
Box 786 - Great Bend, Kansas
 (Address)

SUBSCRIBED AND SWORN to before me this 26 day of April, 1948

My Commission Expires July 29, 1950

My commission expires _____ 22-237 7-47-10M



RECORD OF FORMATION

15-155-62178-0000

Mabel McMurry, S¹ NE SE Sec 10-23-10, Peace Creek, Ks.
(Well # 3)

Sand & red bed, shale	307
Shale & shells	725
Shale	1105
Shale & salt	1390
Lime	1550
Lime & Shale	1700
Shale	1730
Sandy lime	1860
Lime	2065
Lime & shale	2260
Shale	2570
Lime & shale	2700
Shale	2800
Lime	3100
Lime & shale	3175
Shale	3305
Lime	3380
Shale	3395
Lime	3550
Shale & Lime	3600
Lime	3615
Shale & Chat	3650
Shale	3772
Viola Lime	3785

8 5/8" OD 3 Ga. Spiral old casing cemented
305' w/125 sacks.

Top Viola lime 3772'. 5 1/2" OD 17# smls casing cemented 3775' w/100 sacks cement
Drilled to 3785' pay 3784-85', hole filled 2600' w/fluid, 2400' w/oil and 200' water. Ran tubing and rods and tested averaged 7 1/2 bbl. oil cutting approx. 5% water when pumping hard, well will not make water if not pumped hard, took physical pumping test for 61 bbls. which establishes a minimum potential of 15 bbl.

PLUGGING
FILE sec 10 T 23 R 10W
PAGE 10 LINE 76

654 3775
1554 300
534 204
STATE CORPORATION
MAY 25 - 1948

RECORD OF FORMATION

15-155-02178-0000

Mabel McMurry, SW NE SE Sec 10-23-10, Peace Creek, Ks.
(Well # 3)

Sand & red bed, shale	307
Shale & shells	725
Shale	1105
Shale & salt	1390
Lime	1550
Lime & Shale	1700
Shale	1730
Sandy lime	1860
Lime	2065
Lime & shale	2260
Shale	2570
Lime & shale	2700
Shale	2800
Lime	3100
Lime & shale	3175
Shale	3305
Lime	3380
Shale	3395
Lime	3550
Shale & Lime	3600
Lime	3615
Shale & Chat	3650
Shale	3772
Viola Lime	3785

8 5/8" OD 3 Ga. Spiral Weld casing cemented
305' w/125 sacks.

Top Viola lime 3772'. 5 1/2" OD 17# smls casing cemented 3775' w/100 sacks cement
Drilled to 3785' pay 3784-85', hole filled 2600' w/fluid, 2400' w/oil and 200' water. Ran tubing and rods and tested averaged 7 1/2 bbl. oil cutting approx. 5% water when pumping hard, well will not make water if not pumped hard, took physical pumping test for 61 bbls. which establishes a minimum potential of 15 bbl.

PLUGGING
FILE SEC 10 T 23 (100)
BOOK PAGE 10 LINE 76

STATE COMMISSION
JAN 20 1948



THE CARTER OIL COMPANY

TULSA 2, OKLAHOMA

DATE 3-12-48

15-155-02178-0000

NAME

SHOW THIS NUMBER


A 558 B
ON INVOICE

SHIP TO- THE CARTER OIL COMPANY
State Corporation Commission, Conserv. Div., Box 786, Great Bend, Kansas
Wichita, Kansas.

CARE OF W. D. Maxwell
F. O. B.

RENDER ONLY ONE INVOICE IN DUPLICATE FOR EACH ORDER AND MAIL TO BOX 801, TULSA, OKLA.
THIS ORDER ACCEPTED BY VENDOR SUBJECT TO INSTRUCTIONS AND CONDITIONS ON REVERSE SIDE.

QUANTITY	DESCRIPTION OF MATERIAL OR OTHER SERVICE	PRICE
	Chg. to M. McMurry #3 AFE # 7554. Cap. Inv. Confirming ticket # dated 3-9-48 State plugging assesement.	\$ 25.00

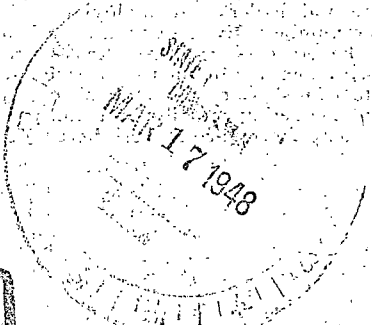

PLUGGING
FILE NO. 10723710W
PAGE 10 LINE 76

THE CARTER OIL COMPANY
MATERIAL AND TRAFFIC DEPARTMENT
J. R. FREEMAN
TULSA 2, OKLAHOMA

BY: *Walter A. Bennett*
REPRESENTATIVE

MAIL ALL CORRESPONDENCE
ON THIS ORDER TO

INSTRUCTIONS

1. Advise receipt and acceptance of order promptly, stating when shipment will be made.
2. Show this order number on Tag, Box, Bill of Lading, Express Receipt and Invoice
3. Transportation charges invoiced must be supported by carrier's original receipted bill.
4. Indicate on your invoice Cash Discount Terms.

CONDITIONS

A. WHERE ORDER COVERS PURCHASE OF MATERIAL:

1. Carter reserves the right to cancel all or any part of this order if not shipped promptly.
2. All material will be subject to our inspection and approval. If rejected, same will be held subject to your instructions, at your risk, and returned at your expense.
3. No charge for packing and cartage will be allowed unless agreed to in advance.
4. On freight shipments routing specified by Carter shall be used. Otherwise, any extra expense will be charged to shipper. If not otherwise specified ship via cheapest way.
5. This order must not be filled without authority from Carter at a higher price than last quoted.
6. Carter assumes no responsibility in respect of verbal orders given by employees outside of its Purchasing Department.
7. Seller warrants that as to its employees applicable provisions of the Fair Labor Standards Act of 1938 have been complied with in respect of the material specified herein.
8. Seller warrants that the use or sale by Carter of materials specified herein will not subject it to charges for patent infringement; it further agrees to hold Carter harmless from any and all claims arising from such charges.

B. WHERE THIS ORDER COVERS LABOR OR SERVICES TO BE PERFORMED, RECIPIENT AGREES AS FOLLOWS:

1. To perform the work specified herein with due diligence according to its own method and at its own risk, it alone having charge and control of all men engaged in carrying out said project, recipient being accountable to Carter only for the completed job.
2. To carry adequate Workmen's Compensation and Liability Insurance sufficient to protect and save both parties harmless and to furnish Carter satisfactory evidence of compliance herewith prior to the commencement of the work provided for in said order.
3. To furnish Carter full and complete release of all labor and materialmen's claims upon completion of the work provided for in said order upon forms to be furnished by Carter.
4. Not to sublet the work covered hereby without the written consent of Carter.
5. To comply with the applicable provisions of the Fair Labor Standards Act of 1938 in performance of work provided for in said order; to comply with and fully accept both State and Federal Unemployment and Social Security Acts and to furnish its number or numbers given pursuant thereto; to pay all contributions or payroll taxes (State or Federal) as to all employees performing work hereunder; and to otherwise comply with the requirements of said Acts and regulations promulgated pursuant thereto, to furnish Carter Certificate or other evidence of compliance with State and Federal laws covering contributions and payment of taxes on payrolls arising in connection with the performance of work hereunder.

3 0 0 1 1 1 0 3