


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Reno County. Sec. 7 Twp. 24 Rge. 4 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SE/4 NE/4 SW/4
Lease Owner Africo Exploration, Inc. LTD
Lease Name Vincent Seck #1 Well No.
Office Address Wichita, Kansas 67214
Character of Well (Completed as Oil, Gas or Dry Hole)

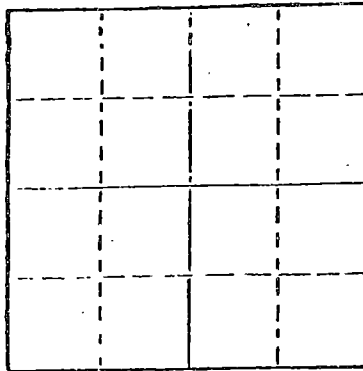

Locate well correctly on above
Section Plat

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 7/16/80 19
Plugging completed 7/4/80 19
Reason for abandonment of well or producing formation
depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Toman
Producing formation Depth to top Bottom Total Depth of Well 3369
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	398	none
				5 1/2"	3366	2684'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Sanded to 3300' and set 5 sacks cement. Loaded hole, shot pipe at 2701', pulled 67 joints. Pushed plug down to fluid, ran 3 1/2 yards ready mix. Well might have to be capped later.

PLUGGING COMPLETE.

8-5-80

RECEIVED
STATE CORPORATION COMMISSION
AUG - 5 1980
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS

STATE OF KANSAS COUNTY OF RICE
R. DARRELL KELSO (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. Darrell Kelso
CHASE, KANSAS
(Address)

SUBSCRIBED AND SWORN TO before me this 31st day of July, 19 80



Margaret Melcher
Notary Public.

My commission expires

DRILLERS LOG

No. 1 Vincent Seck *OK # 263-2981*

CASING RECORD:

8 5/8" @ 398.02'
w/300 sx cement

5 1/2" @ 3,366'
w/100 sx cement

TOTAL DEPTH: 3,369'

COMPANY:

AFRICO Exploration, Ltd.

CONTRACTOR:

Red Tiger Drilling Company

COMMENCED:

December 1, 1978

COMPLETED:

December 8, 1978

DESCRIPTION:

SE/4 NE/4 SW/4
Sec. 7-T24S-R4W
Reno County, Kansas

ELEVATION:

FORMATION

FROM

TO

REMARKS

Sand	0	345	
Sandy Clay & Shale	345	370	
Shale	370	470	
Lime & Shale	470	1467	
Lime	1467	2265	
Lime w/Shale	2265	2664	
Lime	2664	3165	
Lime w/Shale	3165	3250	
Lime	3250	3323	
Mississippi	3323	3369	
RTD		3369	


I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY

Gloria Fawcett
Gloria Fawcett

Subscribed and sworn to before me this 12th day of December, 1978.

Joyce A. Hagermann
Notary Public



RECEIVED
STATE CORPORATION COMMISSION
JUL - 3 1980
CONSERVATION DIVISION
Wichita, Kansas