

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

API NUMBER 15-095-21169

15-095-21169-0000
TYPE OR PRINT

LEASE NAME Ewy #2 0000

NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

WELL NUMBER _____

SPOT LOCATION 150' NW of C7 SW NW

SEC. 17 TWP. 29 RGE. 6 (E) or (W)

LEASE OPERATOR Robert Campbell Oil & Gas Operations

COUNTY Kingman

ADDRESS 260 N. Rock Rd., Suite 110, Wichita, Ks. 67206

Date Well Completed _____

PHONE # (316) 685-6001 OPERATORS LICENSE NO. 5348 COMMISSION

Plugging Commenced 10/30/84

Character of Well _____
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Plugging Completed 11/7/84

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? Wichita

Is ACO-1 filed? _____ If not, is well log attached? _____

Producing formation _____ Depth to top _____ bottom _____ T.D. 4560'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled out
				8 5/8	260'	none
				4 1/2"	4528'	3398'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state, the character of same and depth placed, from _____ feet to _____ feet each set.

Plugged bottom with sand to 4070' & ran 4 sacks cement. Shot pipe at 3619' & 3398'. Pulled 101 joints of pipe. Plugged well with 3 hulls, 6 gel, & 115 sacks 60/40 poz 2% gel 3% c.c.

Plugging complete

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Kelso Casing Pulling License No. 6050

Address Box 347, Chase, Ks. 67524

STATE OF Kansas COUNTY OF Rice, ss.


R. Darrell Kelso

(employee of operator) or (operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) R. Darrell Kelso

(Address) Box 347, Chase, Ks. 67524

SUBSCRIBED AND SWORN TO before me this 12th day of November, 1984



Irene Hoover
Notary Public

My Commission expires: _____

CENTRAL WIRELINE SERVICE

P.O. BOX 1547 Great Bend, Kansas 316-793-5762

15-095-21169-0000

TEMPERATURE SURVEY

Date October 20 1981

TKT 9134

Company Robert E Campbell Oil & Gas Operations

Address 260 N Rock Road Suite 110 City Wichita State Kansas

Contractor Merckle Drlg # 1 Place Belmont 1/2 N 1 W 1/2 S 1/4 E/Loc

Lease Ewy Well No # 2 County Kingman Sec 17 Twp 29 Range 6


Depth Well 4560 Depth Casing 4528 Shoe Jt 14 Size 4 1/2 Weight 9.5 Hole Size 7 7/8

Amount Cement 225 60/40 poz 10% salt 2% gel 3/4 CFR 2 Cementing Co. Sun Oilwell Cementing Co

Survey from 2500 ft To 4496 ft

Details Started detailing at 2500 ft. Found top of cement at 3660 ft. Tagged the Plug at

4496 ft. Zeroed temp tool at ground level. Survey was ran at 100 ft every 60 seconds.

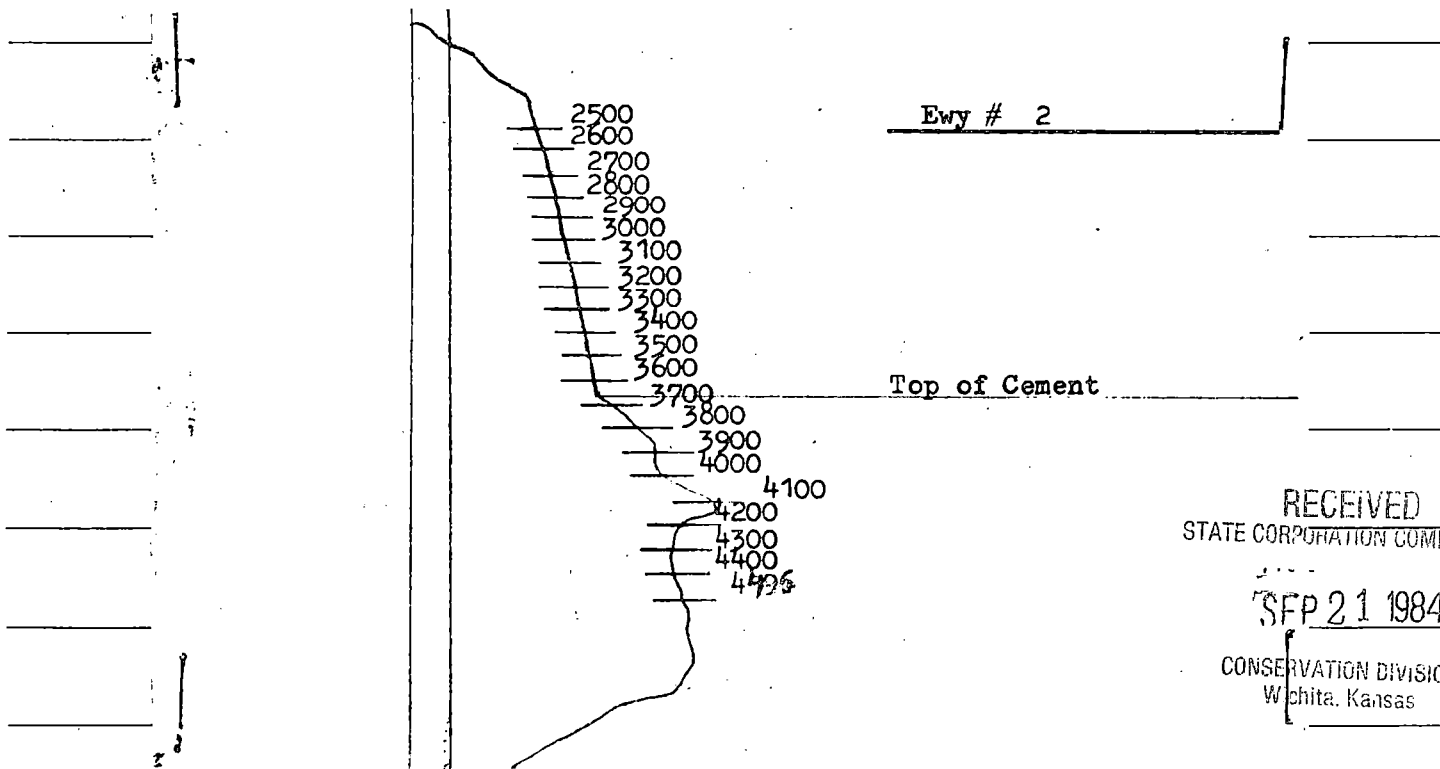

RECEIVED
STATE CORPORATION COMMISSION

SEP 21 1984

CONSERVATION DIVISION
Wichita, Kansas