


DISTRICT CONSERVATION AGENT'S REPORT

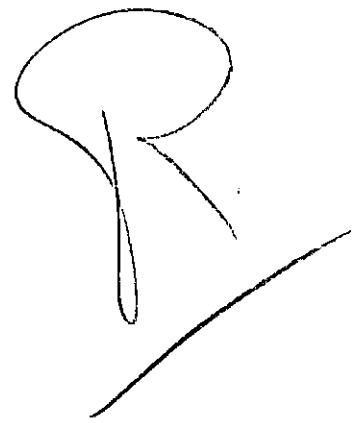

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. 41-37

LOCATION 7 1/2 - SE - 7E

SEC. 11 TWP. 24 RGE. 11-W

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 4 Lease R. Sims

Operator Standard Oil & Gas Co Address Box #7 Ellinwood-Kans.

Field _____ County Stafford

Total Depth 3789 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 1/2 - 255 ft. Circulated with cement.
5 1/2 casing set at 3711 ft. Cemented with 100 sacks cement
Plugged back to 3700 ft with about 5 sacks of
cement. Pumped at 3700 ft. Shot off & Pulled 1/2" casing
filled with mud to 250 ft. Set Rock Bridge & 15 sacks
of cement at 250 ft. Mud to 30 ft. Bridge &
10 sacks of cement at the surface.
Chamberlains Pipe Pulling Co. - Plugging Contractors

PLUGGING RECEIVED
FILE SEC 11 T 24 R 11-W STATE CORPORATION COMMISSION
BOOK PAGE 41 LINE 37
DEC 8 - 1950

12-8-50

C. H. Stouck
District Conservation Agent

CONSERVATION DIVISION
Wichita, Kansas

Date 12-1-50