


STATE OF KANSAS  
 STATE CORPORATION COMMISSION  
 CONSERVATION DIVISION  
 P. O. BOX 17027  
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

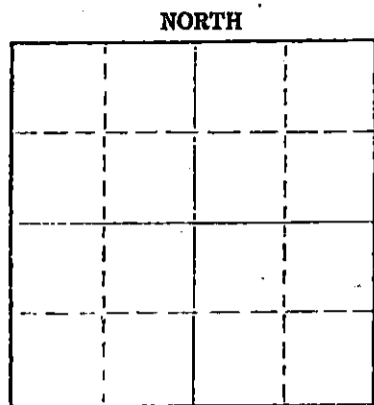

Locate well correctly on above Section Plat

Hodgeman County, Sec. 5 Twp. 24S Rge. (E) 25(W)  
 Location as "NE/CNW/SW" or footage from lines C NW NW  
 Lease Owner O. A. Sutton  
 Lease Name Setzkorn Well No. 1  
 Office Address 800 Sutton Place, Wichita, Kansas 67202  
 Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
 Date well completed June 19 1976  
 Application for plugging filed June 19 1976  
 Application for plugging approved June 19 1976  
 Plugging commenced June 19 1976  
 Plugging completed June 19 1976  
 Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas  
 Producing formation Depth to top Bottom Total Depth of Well 4900 Feet  
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	DATE	FROM	TO	SIZE	PUT IN	PULLED OUT
		JUL 06 1976			8-5/8"	532'	
				7-6-76			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug at 900' with 35 sacks; 2nd plug at 500' with 35 sacks.  
 3rd plug at 40' with 15 sax. 5 sacks in rat hole. Job complete at 2:30 a. m.

(If additional description is necessary, use BACK of this sheet)  
 Name of Plugging Contractor Gabbert-Jones, Inc.  
 Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF KANSAS COUNTY OF SEDGWICK  
 Jack G. Paulsen (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Jack G. Paulsen  
 800 Sutton Place, Wichita, Kansas 67202 (Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of July 1976.

My commission expires June 28, 1978/ Jean S. Taylor Notary Public.

GABBERT-JONES, INC.  
WICHITA, KANSAS  
DRILLERS' WELL LOG

Setzkorn #1  
C-NW-NW Sec 5-24S-25W  
Hodgeman County Kansas

Commenced: 6-8-76

OPERATOR: O. A. SUTTON

From	Depth to	Formation	Remarks
0	536	Clay-Shale	Ran 14 jts of used 8 5/8"
536	670	Shale-Sand	28# csg set @ 532' Cemented
670	1205	Shale-Redbed	w/350 sks Common 2% Gel
1205	1395	Sand	3% CC PD @ 5:30 p.m. 6-8-76
1395	1699	Shale-Redbed	
1699	1726	Anhy	
1726	1923	Shale-Shells	
1923	2385	Shale	
2385	2595	Shale-Lime	
2595	4275	Lime-Shale	
4275	4900	Lime	
	4900 TD		DRY & ABANDONED

STATE OF KANSAS )  
                          ) SS  
COUNTY OF SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above Drillers Log is true and correct to the best of my knowledge and belief and according to the records of this office.


GABBERT-JONES, INC.

*James S. Sutton II*  
JAMES S. SUTTON II

Suscribed and sworn to before me this 24th day of June, 1976.

*Elizabeth J. Edwards*  
ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission Expires February 6, 1979.



RECEIVED  
STATE OF KANSAS (NOT COMMISSION)

JUL 06 1976

CONSERVATION DIVISION  
Wichita, Kansas