

15-009-20079-00-00

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Barton

County. Sec. 4 Twp. 16 Rge. 11 (E) W (W)

Location as "NE/CNW&SW" or footage from lines NE NE NE

Lease Owner Duke Drilling Company

Lease Name Davidson "B" Well No. 1

Office Address Box 823 - Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed July 21 1967

Application for plugging filed " 19 "

Application for plugging approved " 19 "


Plugging commenced July 21 19 "

Plugging completed " 19 "

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

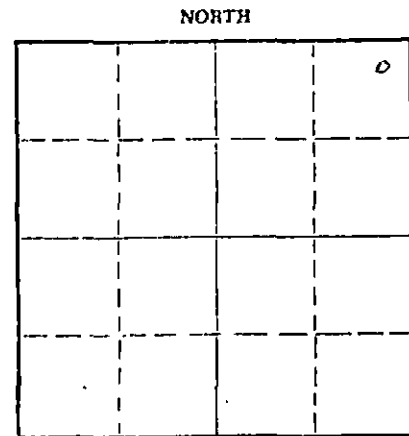

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Don Truan

Producing formation Depth to top Bottom Total Depth of Well 3282 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud to 300'  
1/2 Sack Hulls, PLUG, 25 Sacks cement.  
Filled hole w/heavy mud to 40'  
1/2 Sack Hulls, PLUG - Good Bridge - 10 sks. cement.  
2 sacks in rat hole

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 25 1967  
7-25-67  
CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor

Address

STATE OF KANSAS, COUNTY OF BARTON, ss.

L. O. Chubb (employee of owner) or (owner/producer) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Box 823 - Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 24 day of July, 19 67

My commission expires 4-11-70

[Signature] Notary Public.

W E L L L O G

Date Commenced: July 14, 1967  
 Date Completed: July 21, 1967

Duke Drilling Company  
 DAVIDSON B #1  
 NE NE NE Sec. 4-16-11w  
 Barton County, Kansas

0 - 60' Post Rock Clay  
 60 - 500' Shale & Sand  
 500 - 675' Red Bed  
 675 - 700' Anhydrite  
 700 - 1315' Red Bed, Shale.  
 1315 - 1570' Shale & Shells  
 1570 - 1970' Lime Shale  
 1970 - 2535' Shale - Lime  
 2535 - 2851' Lime  
 2851 - 2854' Shale  
 2854 - 2882' Lime  
 2882 - 2940' Shale & Sand  
 2940 - 2955' Lime Shale  
 2955 - 3254' Lime  
 3254 - 3270' Shale  
 3270 - 3282' Quartz

ELEVATION: 1840 K.B.

FORMATION DATA

Anhydrite	675
Heebner	2851
Brown Lime	2940
Lansing	2955
Quartz	3278
RTD	3282

RECEIVED  
 STATE CORPORATION COMMISSION

JUL 25 1967

CONSERVATION DIVISION  
 Wichita, Kansas

Surface Casing: Set 8-5/8"  
 at 502' with 250 sacks cement.

A F F I D A V I T

State of Kansas  
 County of Barton } ss.

L. O. Chubb, of lawful age, does swear that the facts and statements herein contained are true and correct to the best of his knowledge.

*L. O. Chubb*

L. O. Chubb

Subscribed and sworn to before me this 24 day of JULY, 1967.

My Comm. Expires:  
April 11, 1970

*Norothy M. Hague*  
 Notary Public