

15-095-20831-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Kingman County. Sec. 29 Twp. 30S Rge. 7W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
SE-NE-NW

Lease Owner McCoy Petroleum Co.
Lease Name Mathes Well No. 1
Office Address One Main Place, Suite 410, Wichita, Kansas 67202


Character of Well (Completed as Oil, Gas or Dry Hole)
Oil

Date Well completed 19
Application for plugging filed 9-16 19 81
Application for plugging approved 9-16 19 81
Plugging commenced 9-26 19 81
Plugging completed 9-30-81 12:30 1981
Reason for abandonment of well or producing formation
Not Productive

If a producing well is abandoned, date of last production
19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? Yes
M. V. Leslie

Name of Conservation Agent who supervised plugging of this well
Producing formation Depth to top Bottom Total Depth of Well 4271
Show depth and thickness of all water, oil and gas formations.

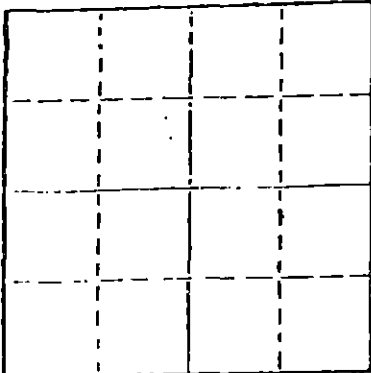

Locate well correctly on above
Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	242	None
				4 1/2	4271	3603

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Dumped sand in from 4270' to 4200'

4 sacks cement from 4200' to 4160'

Ripped pipe at 3603

Allied pump in - 15 Jell - 8 sacks Hull - 10 sacks Jell

125% 50-50 POZ 4% Jell 3% c.c.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Clarke Corporation

STATE OF Kansas COUNTY OF Barber, ss.
Elmer C. Morgenstern (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) Elmer C. Morgenstern
Medicine Lodge, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 6th day of October, 1981

Jessie Hamilton
Notary Public.

My commission expires April 4, 1982

RECEIVED
STATE CORPORATION COMMISSION

OCT 8 1981

CONSERVATION DIVISION
Wichita, Kansas