


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Barton County. Sec. 1 Twp. 16 Rge. 11W (E) (W)

Location as "NE/CNW&SW&" or footage from lines. NW NW NE
Lease Owner John O. Farmer, Inc.
Lease Name Sebesta Well No. 1
Office Address 370 W. Wichita Ave. Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D&A
Date well completed _____ 19____
Application for plugging filed _____ 19____
Application for plugging approved _____ 19____
Plugging commenced April 20, 1966
Plugging completed April 20, 1966
Reason for abandonment of well or producing formation _____

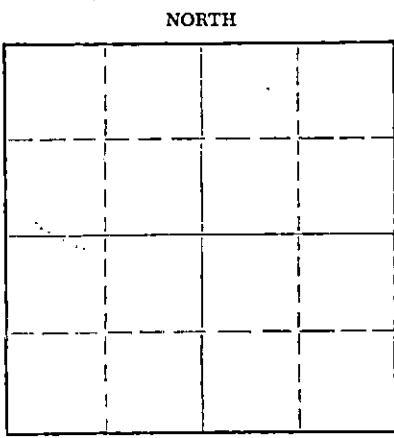

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3410 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	249	---

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

8 5/8" 249" Cwc.

Circulated hole with heavy mud to 240', set plug with 1/4 sack hulls, displaced 25 sacks cement through drill pipe. Mud to 40' 1/2 sack hulls, plug and displaced 10 sacks cement, cementing to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
JUL 29 1968
CONSERVATION DIVISION
Wichita, Kansas
7-29-68

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor Shields Drilling Company, Inc.
Address Shields Bldg., Russell, Kansas

STATE OF KANSAS COUNTY OF RUSSELL, ss.
JOHN O. FARMER President (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) John O. Farmer
P.O. Box 352, Russell, Kansas
(Address)

Subscribed and sworn to before me this 25th day of July, 1968

Helen Carlson
Helen Carlson Notary Public.



My commission expires February 15, 1971



Shields

WELL LOG

Russell, Kansas

15-009-30315-0000

Operator: John O. Farmer, Inc.
 Well: Sebesta #1
 Commenced: April 13, 1966
 Completed: April 20, 1966
 Contractor: Shields Drilling Co., Inc.

Well Description: NW NW NE
 Sec. 1-16S-11W
 Barton Co., Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	240'	Cmtd. w/175 sax

Elevation: 1,871' RB

Treatment:

Production: D & A

Tops:

..... Figures Indicate Bottom of Formations

Clay, post rock, shale & sand	241'
Sand, shale, shells & redbed	696'
Anhydrite	730'
Shale & shells	795'
Shale, shells, & salt	1,390'
Lime & shale	1,775'
Shale & shells	1,815'
Lime & shale	2,700'
Lime	3,410' RTD

RECEIVED
 STATE CORPORATION COMMISSION
 MAY 19 1966
 CONSERVATION DIVISION
 Wichita, Kansas

Notes

DST #1 3,333'-3,385' Tool open 30 min. Recovered 10' mud.
 IBHP - 1,000#; FBHP - 720#; FP-80#