

15-009-06466-0000

STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD


OR

FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plug-  
ging off formations.

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

NORTH



Locate well correctly on above  
Section Plat

Barton County, Sec. 3 Twp. 16 Rge. (E) 11 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines C N $\frac{1}{2}$  SE SW

Lease Owner Lauck & Moncrief et.al.

Lease Name Goodwin Well No. 1

Office Address 520 Fourth Nat'l Bldg. Wichita, Kans.

Character of Well (completed as Oil, Gas or Dry Hole) dry hole

Date well completed July 29 19 43

Application for plugging filed Sept. 22 19 43

Application for plugging approved Sept. 22 19 43

Plugging commenced Sept. 22 19 43

Plugging completed Sept. 26 19 43

Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well

Producing formation Arbuckle Depth to top 3333 Bottom 3387 Total Depth of Well 3387 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle Lime	water	3346	3383	10" 5"	240 3333	none 2811

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from... feet to... feet for each plug set.

3387-3312 cement  
 3312-240 mud  
 240-220 cement  
 220 -20 mud  
 20 - 8 cement (to bottom of cellar)

3.16 11.4  
9.2 45

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Lauck & Moncrief  
Address 520 Fourth National Bank Bldg. Wichita, Kans.

STATE OF Kansas, COUNTY OF Sedgwick, ss.  
E. C. Moncrief (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) E. C. Moncrief  
520 Fourth Nat'l Bank Bldg. Wichita, Kans.

(Address)

SUBSCRIBED AND SWORN to before me this 20 day of October, 19 43

My commission expires Sept. 14, 1947

Elizabeth Kay  
Notary Public.

15-009-016466-0000

LAUCK & MONCRIEF et.al.


No.1 Goodwin

Sec. 3 Twp.16S. R 11W.

Commenced July 3 1943

Casing:

10"	240'	cemented	150 sacks
5"	3333'	"	100 "

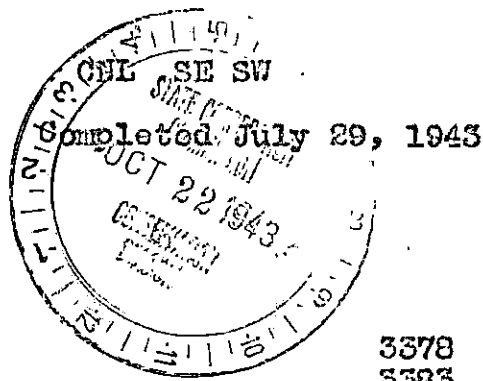

Surface clay	30
lime shells	100
sand	130
shale & lime	175
sandy shale	225
sand	235
shale & shells	575
red rock	690
shale & shells	720
Anhydrite	750
shale & shells	1150
salt	1300
shale & shells	1495
Lime	1690
broken lime	1740
sand	1760
lime	1875
shale & lime	1890
lime	1960
shale & shells	2040
lime	2115
shale & shells	2275
shale	2380
lime & shale	2450
shale	2540
shale & lime	2655
shale	2715
lime & shale	2770
lime	2940
shale & lime	3025
lime	3330
Conglomerate	3335
lime	3337
Standardized:	
3335 -	3333
rotary T D	3335
lime	3340
rainbow	
lime	3346
lime	3351
trace water	

Lime	3378
Lime	3383
Slight increase in water	
lime	3387
dry and abandoned	
Lansing	3026
Arbuckle	3335

PLUGGING  
 FILE SEC 3 16-11W  
 BOOK PAGE 92 LINE 45