

15-195-20680-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Trego County, Sec. 28 Twp. 12S Rge. 22W E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C SE/4 NE/4

Lease Owner Steven D. Angle d/b/a Angle Oil Company
Lease Name Anderson Well No. 1
Office Address 40 Stratford, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole) _____

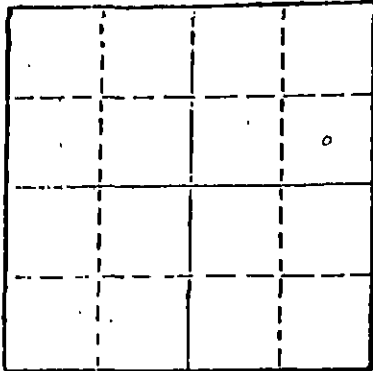

Locate well correctly on above
Section Flat

Date Well completed July 26, 1980
Application for plugging filed July 26, 1980
Application for plugging approved July 26, 1980
Plugging commenced July 26, 1980
Plugging completed July 26, 1980
Reason for abandonment of well or producing formation _____
D & A

If a producing well is abandoned, date of last production 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Gil Balthazor
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4,101'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	286.01'	-0-

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug-set.

Plugged hole @ 760' w/60 sx cement
@ 280' w/30 sx cement
@ 40' w/10 sx cement
5 sx cement in rathole
50-50 Pozmix, 6% Gel

RECEIVED
STATE CORPORATION COMMISSION

SEP 12 1980

9-12-80
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Red Tiger Drilling Company
1720 KSB&T Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss. contractor
Gloria Fawcett (employee of ~~XXXXXX~~)


of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Gloria Fawcett
1720 KSB&T Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of July, 1980.

Joyce A. Hagermann
Notary Public.

My commission expires _____



DRILLERS LOG

No. 1 Anderson--Hacker

CASING RECORD: 8 5/8" @ 293'
w/180 sx cement
D & A
TOTAL DEPTH: 4,101'


COMPANY: Angle Oil Company
CONTRACTOR: Red Tiger Drilling Company
COMMENCED: July 12, 1980
COMPLETED: July 26, 1980

DESCRIPTION: C SE/4 NE/4
Sec. 28-T12S-R22W
Trego County, Kansas
ELEVATION: 2382 GL
2387 KB


<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Shale	0	900	
Sand	900	1116	
Shale	1116	1790	
Anhydrite	1790	1828	
Shale	1828	3130	
Shale & Lime	3130	3282	
Lime	3282	4035	
Conglomerate	4035	4072	
Arbuckle	4072	4101	
RTD		4101	

I certify that this is a true and correct copy of the above log to the best of my knowledge.

RED TIGER DRILLING COMPANY


Gloria Fawcett

Subscribed and sworn to before me this 29th day of July, 1980.


Notary Public



RECEIVED
STATE CORPORATION COMMISSION
SEP 12 1980
CONSERVATION DIVISION
Wichita, Kansas