

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
200 Colorado Derby Building
Wichita, Kansas 67202

FORM CP-1
Rev.03/92

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 15-093-20846-0000 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API# was issued, indicate spud or completion date.

WELL OPERATOR AMOCO PRODUCTION COMPANY KCC LICENSE # 5952
(owner/company name) (operator's)
ADDRESS P. O. BOX 800 ROOM 925 CITY DENVER
STATE _____ CO. _____ ZIP CODE 80201 CONTACT PHONE # (303) 830-5130
LEASE THOMAS GU /A//GG/ WELL# 2 SEC.14 ___ T.24 ___ R. 36 (East/West)

X _____ SPOT LOCATION/QQQQ COUNTY KEARNY

X 1320 FEET (in exact footage) FROM S (N) (circle one) LINE OF SECTION (NOT Lease Line)

1320 FEET (in exact footage) FROM E (W) (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL ___ GAS WELL X ___ D&A ___ SWD/ENHR WELL ___ DOCKET# _____

CONDUCTOR CASING SIZE _____ SET AT _____ CEMENTED WITH _____ SACKS

SURFACE CASING SIZE 8 5/8" SET AT 814 CEMENTED WITH 650 SACKS

PRODUCTION CASING SIZE 5 1/2" SET AT 2912 CEMENTED WITH 500 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: PERF CASING @ 2709-2790 O.H. 2711-24

ELEVATION 3043 T.D. 2950 PBSD 2912 ANHYDRITE DEPTH _____
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD X POOR _____ CASING LEAK _____ JUNK IN HOLE _____
KANSAS CORPORATION COMMISSION

PROPOSED METHOD OF PLUGGING SEE ATTACHED

RECEIVED
KANSAS CORPORATION COMMISSION
5-23-94

MAY 23 1994

(If additional space is needed attach separate page) CONSERVATION DIVISION WICHITA, KS

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? ___ NO ___ IS ACO-1 FILED? ___ YES ___

If not explain why? _____

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS:

JOE EUDEY _____ PHONE# (316) 356-6981

ADDRESS _____ City/State _____

PLUGGING CONTRACTOR HALLIBURTON KCC LICENSE # _____
(company name) (contractor's)

ADDRESS _____ PHONE # () _____

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) _____

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 5/11/94 AUTHORIZED OPERATOR/AGENT: Ellen Hartley
(signature)

RECEIVED
STATE CORPORATION COMMISSION
MAY 16 1994
CONSERVATION DIVISION
Wichita, Kansas

1)

Mid-Continent PBU Completion

File: DWB- -400.1

Operating Center Foreman: Kelly Gindlesberger Date: 4/13/94

Type of Operation: Plug and Abandonment

Lease and Well Name: Thomas "A" No. 2

Field: Hugoton

Formation: Council Grove

Location: Sec 14, T-24-S, R-36-W, Kearny County, Kansas

Elevation: 3043' Ref Pt: KB

TD: 2950' PBSD: 2912'

Surface Csg: 8.625", 24# CSA: 814'

Production Csg: 5.5", 15.5# CSA: 2912'

RECEIVED
KANSAS CORPORATION COMMISSION


Purpose: To PxA subject well.

MAY 23 1994

WELLBORE SKETCH

PROCEDURE

CONSERVATION DIVISION
WICHITA, KS

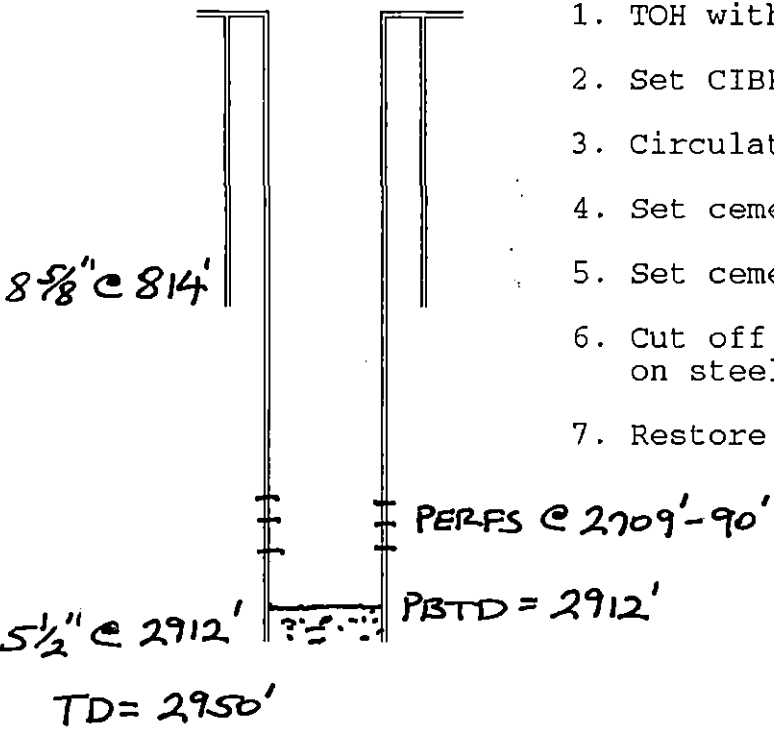

1. TOH with tbg, rods, and pump.
2. Set CIBP with 2 sx cement at 2650'.
3. Circulate hole with 9 ppg mud (36 visc.)
4. Set cement plug from 850' to 450'.
5. Set cement plug from 55'-5'.
6. Cut off casing 5' below ground and weld on steel cap with lease identification.
7. Restore location.

Prepared By: Ed Long

Approved By: 

Distribution:

- * Ellen Hartzler - Rm. 925
- K. Gindlesberger - Ulysses
- B. Y. Roundtree - Rm. 927
- J. Eudey - Ulysses
- J. Loftis - Ulysses

* Original to Ellen Hartzler who will send to wellfiles

RECEIVED
KANSAS CORPORATION COMMISSION
MAY 16 1994
CONSERVATION DIVISION
Wichita, Kansas



Kansas Corporation Commission

Joan Finney, Governor Susan M. Seltman, Chair F.S. Jack Alexander, Commissioner Rachel C. Lipman, Commissioner
Judith McConnell, Executive Director Brian Moline, General Counsel

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

May 23, 1994

Amoco Production Company
P O Box 800 Rm 925
Denver CO 80201

Thomas GU/A/CG #2
API 15-093-20,846-0000
1320 FNL 1320 FWL
Sec. 14-24S-36W
Kearny County

Dear Joe Eudey,

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.


Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least at five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

Sincerely,


David P. Williams
Production Supervisor

District: #1
304 W. McArtor
Dodge City KS 67801
(316) 225-6760