

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
130 S. Market, Room 2078
Wichita, KS 67202

FORM CP-1
Rev. 03/92

WELL PLUGGING APPLICATION FORM
(PLEASE TYPE FORM and File ONE Copy)

API # 15-093-21221-0000 (Identifier number of this well). This must be listed for wells drilled since 1967; if no API # was issued, indicate spud or completion date.

WELL OPERATOR BP AMERICA PRODUCTION COMPANY KCC LICENSE # 5952
ADDRESS P. O. BOX 3092, WL1, RM 3.329 (owner/company name) CITY HOUSTON (operator's)

STATE TEXAS ZIP CODE 77253-3092 CONTACT PHONE # (281) 366-2052

LEASE NUSS 'B' WELL # 3 SEC. 27 T. 24S R. 35W (East/West)

- C - SE - NE SPOT LOCATION/QQQQ COUNTY KEARNY

1980 N FEET (in exact footage) FROM S (circle one) LINE OF SECTION (NOT Lease Line)

660 E FEET (in exact footage) FROM E/W (circle one) LINE OF SECTION (NOT Lease Line)

Check One: OIL WELL GAS WELL D&A SWD/ENHR WELL DOCKET # _____

CONDUCTOR CASING SIZE NONE SET AT _____ CEMENTED WITH _____ SACKS

SURFACE CASING SIZE 8 5/8" SET AT 653' CEMENTED WITH _____ SACKS

PRODUCTION CASING SIZE 5 1/2" SET AT 3128' CEMENTED WITH 745 SACKS

LIST (ALL) PERFORATIONS and BRIDGEPLUG SETS: 2718-3020'; OPEN HOLE PLUG-3128-3300'

ELEVATION 2962'-KB T.D. 5050' P.B.T.D. 3085' ANHYDRITE DEPTH _____
(G.L./K.B.) (Stone Corral Formation)

CONDITION OF WELL: GOOD POOR CASING LEAK _____ JUNK IN HOLE _____

PROPOSED METHOD OF PLUGGING SEE ATTACHED PROCEDURES

FEB 25 2002

(If additional space is needed, attach separate page)

IS WELL LOG ATTACHED TO THIS APPLICATION AS REQUIRED? YES IS ACO-1 FILED? YES

If not explain why? _____

PLUGGING OF THIS WELL WILL BE DONE IN ACCORDANCE WITH K.S.A. 55-101 et. seq. AND THE RULES AND REGULATIONS OF THE STATE CORPORATION COMMISSION.

LIST NAME OF COMPANY REPRESENTATIVE AUTHORIZED TO BE IN CHARGE OF PLUGGING OPERATIONS.

SUE SELLERS PHONE # (281) 366-2052

ADDRESS P. O. BOX 3092, WL 1, RM 3.329 City/State HOUSTON, TEXAS 77253-3092

PLUGGING CONTRATOR HALLIBURTON SERVICES KCC LICENSE # 5287-99997
(company name) (contractor's)

ADDRESS _____ PHONE # () _____

PROPOSED DATE AND HOUR OF PLUGGING (If Known?) _____

PAYMENT OF THE PLUGGING FEE (K.A.R. 82-3-118) WILL BE GUARANTEED BY OPERATOR OR AGENT

DATE: 02/22/02 AUTHORIZED OPERATOR/AGENT: Sue Sellers
(signature)



Kansas Corporation Commission

Bill Graves, Governor John Wine, Chair Cynthia L. Claus, Commissioner Brian J. Moline, Commissioner

NOTICE OF RECEIPT OF WELL PLUGGING APPLICATION (CP-1)

BP America Production Company
2225 West Oklahoma Avenue
Ulysses, KS 67880

March 07, 2002

Re: NUSS B #3
API 15-093-21221-00-00
SENE 27-24S-35W, 1980 FNL 660 FEL
KEARNY COUNTY, KANSAS

Dear Operator:

This letter is to notify you that the Conservation Division is in receipt of your plugging proposal, form CP-1, for the above-captioned well.

Your CP-1 has been reviewed by the Conservation Division central office for completeness and to verify license numbers. The plugging proposal will now be forwarded to the district office listed below for review of your proposed method of plugging.

Please contact the district office for approval of your proposed plugging method at least five (5) days before plugging the well, pursuant to K.A.R. 82-3-113 (b). If a workover pit will be used during the plugging of the well it must be permitted. A CDP-1 form must be filed and approved prior to the use of the pit.

The Conservation Division's review of form CP-1, either in the central or district office, does not include an inquiry into well ownership or the filing operator's legal right to plug the well.

This notice in no way constitutes authorization to plug the above-captioned well by persons not having legal rights of ownership or interest in the well. This notice is void after ninety (90) days from the above date.

District: #1
210 E Frontview, Suite A
Dodge City, KS 67801
(316) 225-8888

Sincerely,

A handwritten signature in cursive script, appearing to read "David P. Williams".

David P. Williams
Production Supervisor

Plugging Application
Nuss B 3 – Abandonment
Section 27, T24S, R35W
Kearny County

The application attached is to abandon the Nuss B 3. BP America Production Company is abandoning this well since it is uneconomic to operate. It is doubtful that commercial gas production can be obtained.

RECEIVED
KANSAS CORPORATE REGISTRATION

FEB 25 2002

CONSERVATION DIVISION


**Plugging Procedure for the Nuss B 3
Section 27 T24S R35W
Kearny County, Kansas**

NOTE – NOTIFY KCC DISTRICT OFFICE AT LEAST FIVE DAYS IN ADVANCE OF WORK.

This procedure was approved via a telephone conversation between Cary Spohn (BP representative) and Steve Durant (KCC) on February 13, 2002.


1. Pump cement filling 7" casing full of cement from ground level to 3020'. Use 320 sacks of Class H, 60/40 poz cement with 6% gel. Lead slurry to contain 7 sacks of cottonseed hulls. Mix cement at 13.2 ppg with a yield of 1.53 cu. ft. per sack.
2. Have 50 extra sacks of cement to fill annulus between 5.5" casing and 8.625" casing.
3. Cut casing strings 5 ft below ground level.
4. Weld on steel cap with lease identification.
5. Restore location.

Nuss B 3
Section 27, T24S, R35W
Kansas Panoma Gas Field
Kearny County, Kansas

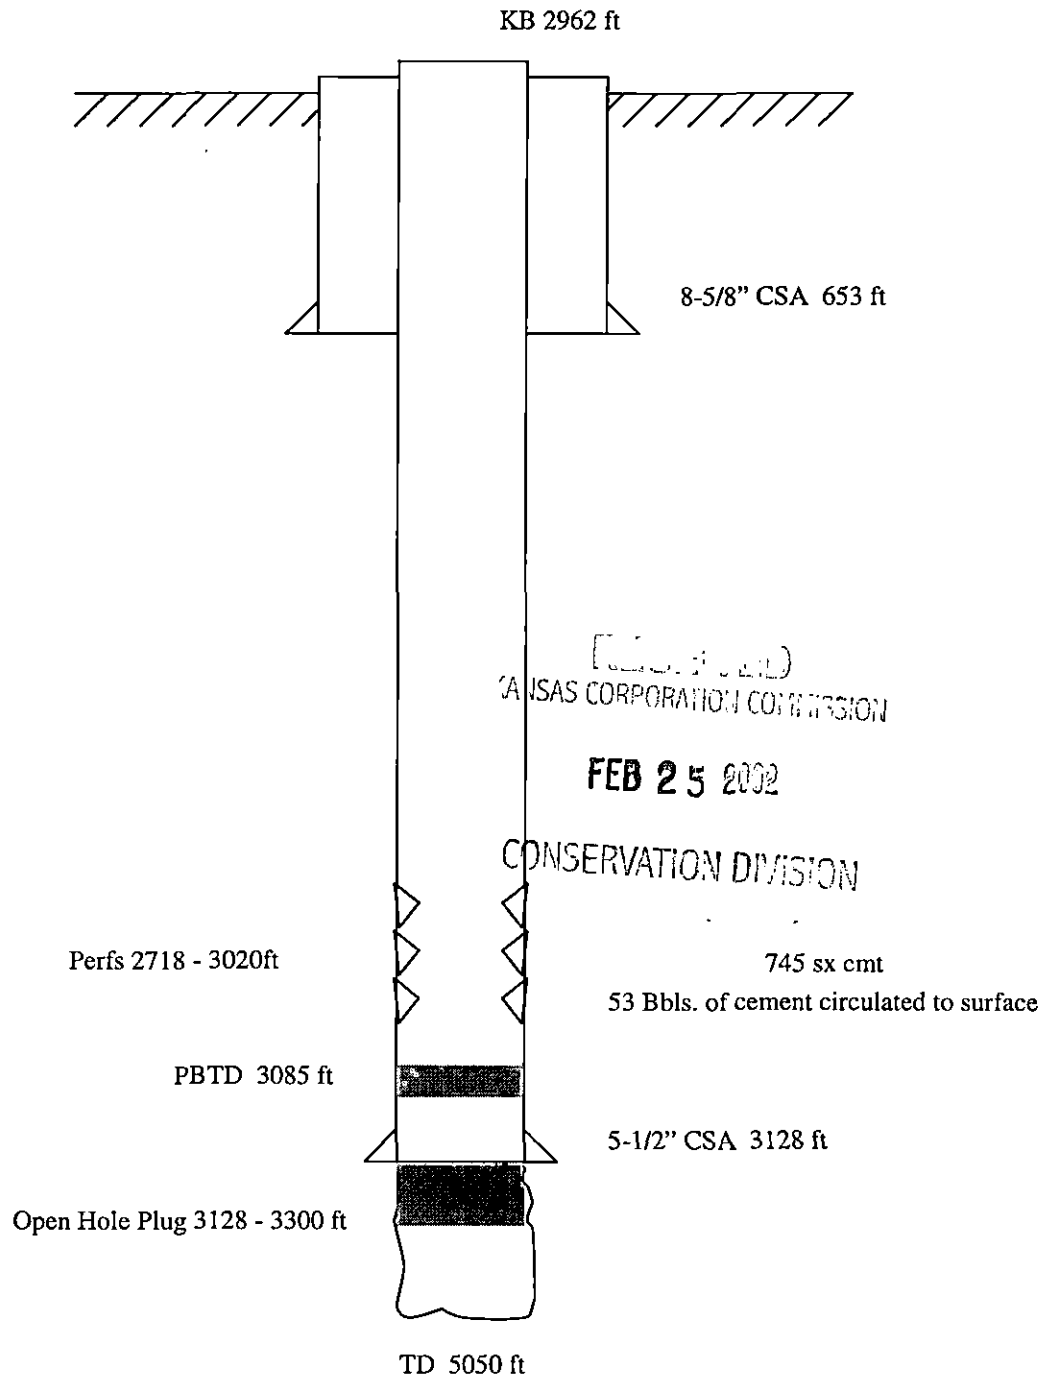

Nuss B 3
Section 27, T24S, R35W
Kansas Panoma Gas Field
Kearny County, Kansas

KB 2962 ft

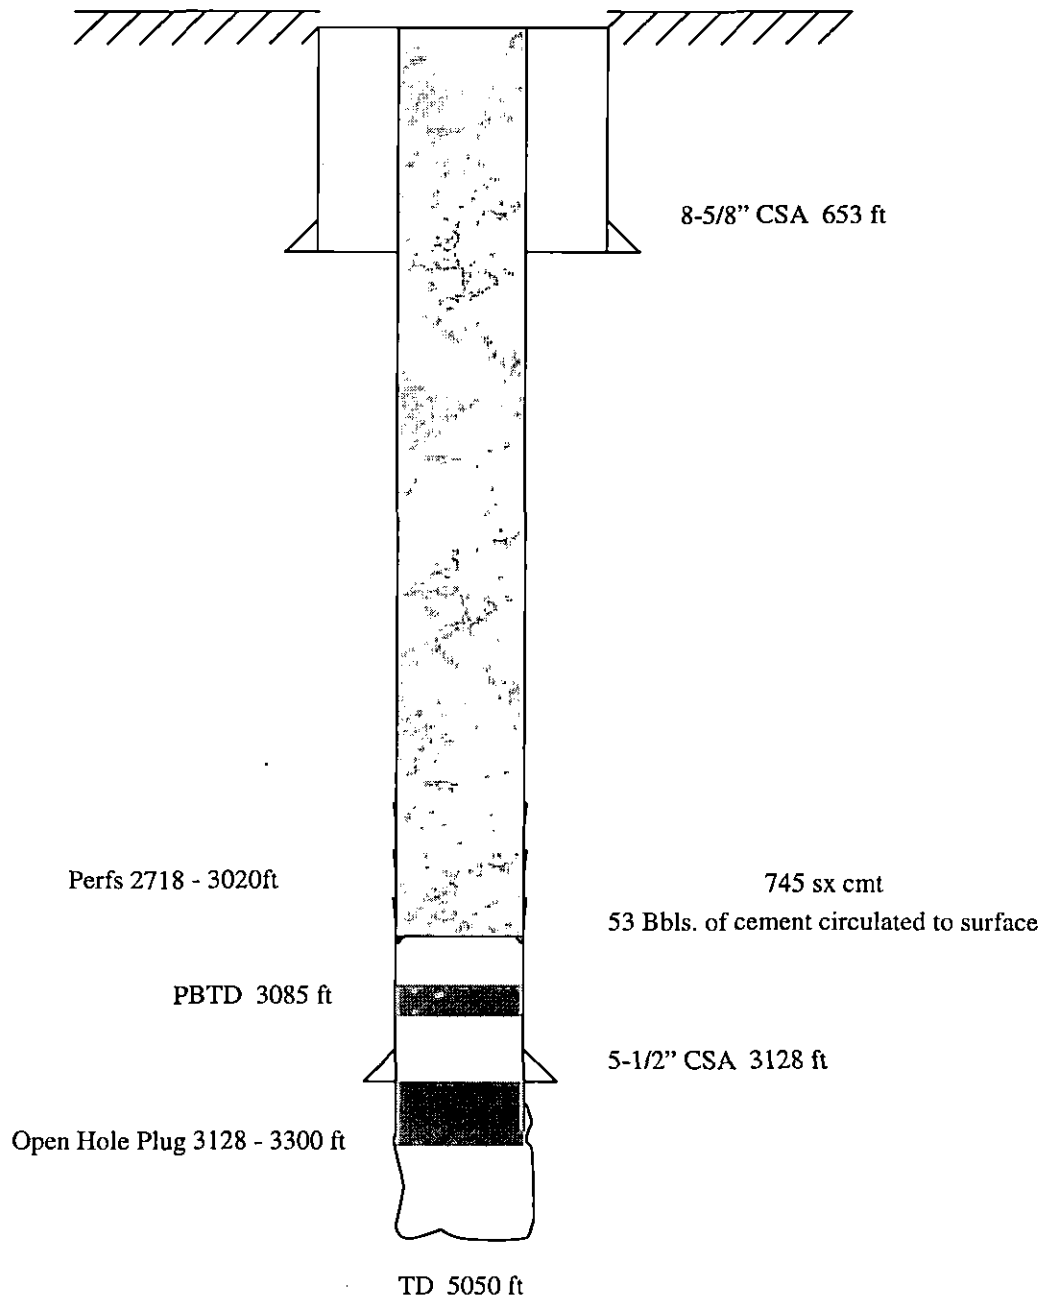

Not to scale