

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-075-00071-00-00
Spot: CE2 Sec/Twnshp/Rge: 11-24S-39W
2540 feet from N Section Line, 1320 feet from E Section Line
Lease/Unit Name: TEBO Well Number: 1
County: HAMILTON Total Vertical Depth: 2622 feet

Operator License No.: 31656
Op Name: KENWORTHY OPERATING COMPANY
Address: 8906 E. SKELLY DR.
TULSA, OK 74129

Conductor Pipe: Size feet: 8.625 885.22
Surface Casing: Size 8.625 feet: 366 WITH 200 SX CMT
Production: Size 5.5 feet: 2616 WITH 150 SX CMT
Liner: Size feet:

Well Type: GAS UIC Docket No: Date/Time to Plug: 10/28/2002 11:00 AM

Plug Co. License No.: 8438 Plug Co. Name: POST & MASTIN WELL SERVICE, INC.

Proposal Rcvd. from: KEN LANG Company: KENWORTHY OPERATING CO. Phone: (918) 610-7790

Proposed Plugging Method: CIBP @ 2164' & 2 SX CMT. PLUG AT 800' WITH 80 SX CMT. PLUG AT 400' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT. BRING 10 SX GEL & 300# HULLS.

Plugging Proposal Received By: MICHAEL MAIER

WitnessType: Plugging Operations 100% Witnessed (Complete)

Date/Time Plugging Completed: 10/28/2002 4:00 PM

KCC Agent: KEVIN STRUBE

Actual Plugging Report:


PBTD 2510'. PERFS AT 2430'. CASING LEAK AT 1049-1184'. CIBP @ 2164' WITH 2 SX CMT ON TOP. SHOT CASING AT 840' NOT ABLE TO PULL. RUN TUBING IN HOLE TO 1200'. PUMPED 100 SX CMT. CIRCULATED TO SURFACE ON 5 1/2". PUMPED DOWN 5 1/2" 25 SX CMT. DISPLACED TO 400' WITH WATER. CUT PIPE AT 300'. CIRCULATED CMT TO SURFACE WITH 25 SX 60/40 POZMIX 6% GEL & 50 SX 60/40 POZMIX 2% GEL 3% CC. AT 840' SQUEEZED OUT 70 SX CMT.

RECEIVED
NOV 04 2002
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: TBG

District: 01

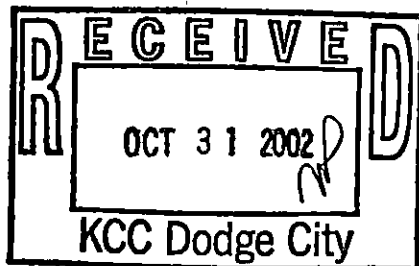

Signed

Kevin D Strube

(TECHNICIAN)

INVOICED

DATE 11-5-02

INV. NO. 2003060738

PRINCP2/1