

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-093-20012-00-00  
Spot: E2W2SE Sec/Twnshp/Rge: 34-24S-38W  
1320 feet from S Section Line, 1420 feet from E Section Line  
Lease/Unit Name: SMALLEY Well Number: 1-34  
County: KEARNY Total Vertical Depth: 2465 feet

Operator License No.: 5062  
Op Name: SHAW, GEORGE R.  
Address: 1001 COMMERCE BANK CENTER 150 N  
WICHITA, KS 67202

Conductor Pipe: Size feet: 380.11  
Surface Casing: Size 10.75 feet: 217 WITH 225 SX CMT  
Production: Size 7 feet: 2380 WITH 200 SX CMT  
Liner: Size feet:

Well Type: GAS UIC Docket No: Date/Time to Plug: 12/12/2002 1:30 PM  
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES  
Proposal Rcvd. from: RON OSTERBUHR Company: GEORGE R. SHAW Phone: (316) 267-0382

Proposed Plugging Method: SET CIBP @ 2300' WITH 2 SX CMT ON TOP. PRESSURE TEST CASING. PERFORATE CASING AT 660'. CIRCULATE CMT TO SURFACE FILLING 7" & 7" X 10 3/4" ANNULUS WITH 60/40 POZMIX 6% GEL .

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 12/12/2002 4:30 PM KCC Agent: KEVIN STRUBE

Actual Plugging Report:


PBTD 2465'. 5 1/2" SLOTTED LINER FROM 2367-2471'. SET CIBP @ 2295' WITH 2 SX CMT ON TOP. LOADED HOLE & PRESSURED UP TO 500#. PERFORATED AT 660'. PUMPED DOWN 7" 225 SX CMT. CIRCULATED 25 SX CMT TO PIT.

RECEIVED  
12-18-2002  
DEC 18 2002  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON. NO CASING RECOVERED.

Plugged through: CSG

District: 01

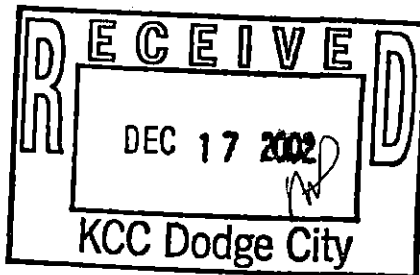

Signed

*Kevin D. Strube*

(TECHNICIAN)

INVOICED

DATE 12-19-02

WV. NO. 2003060959

Form CP 2/3