


15009-19241-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Form CP-4

WELL PLUGGING RECORD

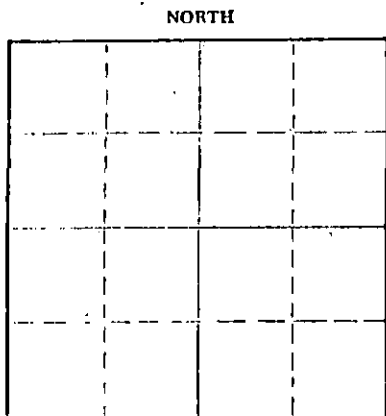

Locate well correctly on above
Section Plat

Barton County, Sec. 16 Twp. 16S Rge. 11W XX (W)
Location as "NE/CNW/SW" or footage from lines SW NW SE
Lease Owner James E. Clark
Lease Name Esfeld Well No. 2
Office Address 419 First National Bank Bldg. Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed January 8, 1965
Application for plugging filed January 8, 1965
Application for plugging approved January 8, 1965
Plugging commenced January 8, 1965
Plugging completed January 8, 1965
Reason for abandonment of well or producing formation Dry Hole
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation Depth to top Bottom Total Depth of Well 3,365 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	271.56'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from rotary total depth 3,365 feet to 270 feet. Set bottom plug at 270 feet and cemented with 25 sacks cement. Filled hole with heavy rotary mud to 40 feet. Set top plug at 40 feet and cemented with 10 sacks cement - 2 sacks in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

JAN 25 1965
1-25-65
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor H-30, Inc.
Address 200 North Main, Wichita, Kansas

STATE OF Kansas COUNTY OF Sedgwick
Geraldine Hays (employee of owner or owner's operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) Geraldine Hays
200 North Main, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of January, 1965

My commission expires

July 5, 1966

Mary Jones

Notary Public.

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

15009-19241-0000


COMPANY James E. Clark, et al
FARM Esfeld NO. 2

SEC. 16 16S 11W
LOC. SW NW SE

TOTAL DEPTH 3,365'
COMM. 12-29-64 COMP. 1-8-65
SHOT OR TREATED H-30, Inc.
CONTRACTOR
ISSUED

COUNTY Barton

KANSAS



CASING
20 10 5/8" 271.56' cen. w/175 sx
15 8
12 6
13 5

ELEVATION 1893 KB

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Top Soil	25
Post Rock, sand & clay	65
Shells & clay	130
Shells, Clay, Shale & red bed	281
Shale, sand & shells	445
Shale & Shells	485
Sand	520
Shale & Shells	738
Anhydrite	765
Shells, shale & red bed	1145
Shale & Shells	1480
Shale & Lime	1700
Lime & Shale	1890
Shale w/lime streaks	2045
Shale & Lime	2425
Lime & Shale	2802
Shale & Lime	2880
Lime & Shale	2910
Shale & Lime	3045
Lime and shale	3124
K. C. Lime	3225
Lime	3280
Lime w/shale streaks	3329
Lime & Chert	3345
Arbuckle	3352
Lime	3365
Rotary Total Depth	3365

RECEIVED
STATE CORPORATION COMMISSION

JAN 22 1965

CONSERVATION DIVISION
Wichita, Kansas

I hereby certify that the above and foregoing is a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

By Geraldine Hays

STATE OF KANSAS }
SEDGWICK COUNTY } SS:

Subscribed and sworn to before me, a Notary Public in and for said county and state, this 20th day of January, 1965.

Mary Jones
Notary Public

My Commission Expires:

July 5, 1966