15-009-03026-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217

WELL PLUGGING RECORD

NORTH

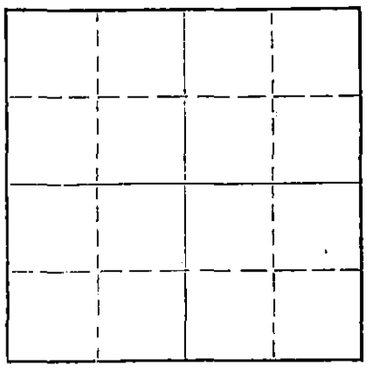

Locate well correctly on above Section Plat

Barton County. Sec. 16 Twp. 16 Rge. 11 (E) (W) X
Location as "NE/CNW¼SW¼" or footage from lines S/2 SW SW
Lease Owner Graham Michaelis Corporation
Lease Name Redetzke C Well No. #2
Office Address 211 N. Broadway Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 5-17-73 19
Plugging completed 5-19-73 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Donald Truan
Producing formation Depth to top Bottom Total Depth of Well 3315' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS — CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5½"	3307'	2735.24'
				8 5/8"	539'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 3100'. Mixed and ran 5 sacks cement thru dump bailer.
Mudded hole to 270' - set 20# rock bridge. Filled hole with 5 yards ready-mix from 350' to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
MAY 22 1973
5-22-73
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.
Address Box 364 GreatBend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Jr.
Box 364 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21 day of May, 19 73

Sidney D. Miller
Notary Public.

My commission expires October 1976

SIDNEY D. MILLER
NOTARY PUBLIC
BARTON COUNTY, KANSAS
ILLINOIS

508 . st Murdock Wichita, Kansas


15-009-03026-0000

Company. GRAHAM-MESSMAN-RINEHART
Farm. Rodotzko ~~"B"~~ "C" No. 2

SEC. 16 T. 16 R. 11W
CS/2 SW SW

Total Depth. 3311
Comm. 5-24-51 Comp. 6-5-51
Shot or Treated.
Contractor. J. W. Bradon Drlg. Co.
Issued. 7-21-51

County. Barton
KANSAS



Elevation. 1886

Production. Pmp. 25 bbls.

CASING:
8 5/8" 539'
5 1/2" 3307'

Figures Indicate Bottom of Formations.

post rock	55
shalo & shells	530
red bed -	537
red bed & shalo	785
shalo & shells	1500
lime & shalo	1800
lime	1900
lime & shalo-	2545
lime	3309
lime	3311
Total Depth	

Scout Tops:

Brown Lime	3008
Lansing	3026
Arbuckle	3306

3026
1320
-1140

RECEIVED
STATE CORPORATION COMMISSION
MAY 15 1973
CONSERVATION DIVISION
Wichita, Kansas