



15-009-06485-0000

Casing Record.

Farmers and Merchants Bank Well No. 1. SW NW 16-16-11W

Barton County, Kansas.

Hinkle Oil Company and Franco Central Oil Company.

Contractor: J. B. Hinkle.

Commenced 6-2-46


Completed 6-20-46

Elevation: 1878

122' 8" of 5 1/2"  
3343' 5" of 5 1/2"

0	122	Surface
122	469	Shale and shells
469	498	Sand hard
498	520	Shale and shells
520	635	Red shale
635	720	Shale
720	745	Anhydrite
745	840	Shale
840	1267	Shale and shells
1267	1410	Salt and shale
1410	1818	Lime and shale
1818	1930	Lime
1930	2217	Shale and lime
2217	2606	Shale and shells
2606	2774	Lime and shale
2774	2913	Lime
2913	3022	Lime and shale
3022	3035	Lime hard
3035	3040	Lime soft
3040	3064	Lime hard
3064	3070	Lime soft
3070	3289	Lime
3289	3318	Shale and shells
3318	3320	sand
3320	3324	Sand and chert
3324	3327	Sand
3327	3331	Sand and chert
3331	3359	Conglomerate.
3359	T. D.	

Tops:	Topoka line	2665
	Lansing	3013
	Base K. C.	3257
	Cong.	3316

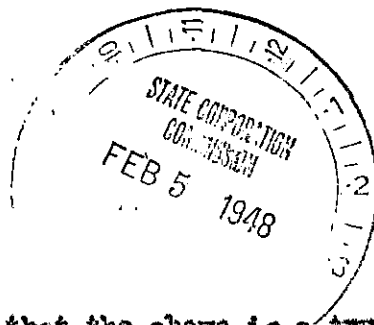

State of Kansas, )  
 County of Sedgwick ) ss

I hereby certify that the above is a true and correct log as compiled from the daily drilling reports kept on said well.

Subscribed and sworn to before me this 24th day of June, 1946.

*Muriel A. Lupton*  
 H. P.

My commission expires 1-17-50

**PLUGGING**  
 FILE SEC. 16 T. 16 R. 11 W  
 BOOK PAGE 74 LINE 18