


STATE OF KANSAS
STATE CORPORATION COMMISSION

15-009-21341-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

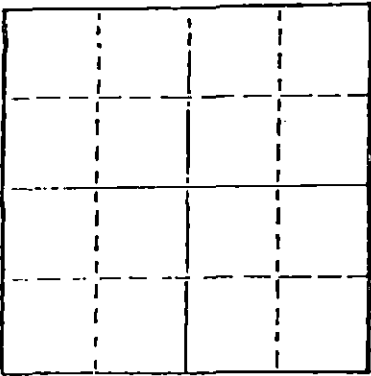

Locate well correctly on above
Section Plat

Barton County. Sec. 13 Twp. 16 Rge. 11 E/W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
C N/2 SE SE

Lease Owner Messman Reinhart Corporation
Lease Name ~~Wichita~~ Zajac Well No. 1
Office Address Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

Date Well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 9/20/79 19
Plugging completed 9/25/79 19
Reason for abandonment of well or producing formation
depleted.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or
its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Rankin
Producing formation Depth to top Bottom Total Depth of Well 3426
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	388	none
				4 1/2"	3421	2391

Describe in detail the manner in which the well was plugged, indicating where the mud fluid
was placed and the method or methods used in introducing it into the hold. If cement or other
plugs were used, state the character of same and depth placed, from feet to
feet for each plug set.

Sanded to 3375' and ran 4 sacks cement. Shot pipe at 2811', 2609', 2400', pulled 40 joints.
Pumped 4 sacks hulls, 25 sacks gel, plug and 100 sacks 50-50 pos, 2% gel.

PLUGGING COMPLETE.

RECEIVED
STATE CORPORATION COMMISSION
10-12-79
OCT 12 1979

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KELSO CASING PULLING
CHASE, KANSAS


STATE OF KANSAS COUNTY OF RICE, ss.
E. DARRELL KELSO (employee of owner) or (owner or operator)
of the above-described well, being first duly sworn on oath, says: That I have knowledge of
the facts, statements, and matters herein contained and the log of the above-described well
as filed and that the same are true and correct. So help me God.

(Signature) E. Darrell Kelso
CHASE, KANSAS

(Address):

SUBSCRIBED AND SWORN TO before me this 30th day of Sept., 1979

My commission expires



Margaret Melcher
Notary Public.

STERLING DRILLING COMPANY
P. O. Box 129
Sterling, Kansas 67579

WELL LOG ----- ZAJIC #1

Located: 660' FEL; 990' FSL of the SE/4, Section 13-16S-
11W, Barton County, Kansas

OWNER: Messman-Rinehart Corporation
ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: February 22, 1978

COMPLETED: March 1, 1978

TOTAL DEPTH: 3426'

LOG

0 - 40 Clay and Slate Ledges
40 - 391 Shale - Sand
391 - 910 Shale
910 - 2740 Lime and Shale
2740 - 3426 Lime

CASING RECORD

Ran 9 joints 8 5/8", 28# used OD casing.
376' pipe set at 388' K.B. Cemented with
200 sacks Regular cement, with 2% gel and
3% cc. Plug down at 9:45 AM, 2-23-78.

Ran 86 joints new 4 1/2" OD seamless
casing. 3420.80' set at 3421 K.B. with
50 sacks Regular cement. Plug down at
10:00 PM, 3-1-78, by Allied.