


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

Barton County. Sec. 14 Twp. 16 Rge. (E) 11 (W)
Location as "NE/CNW 1/4 SW 1/4" or footage from lines NEc SW 1/4
Lease Owner D. R. Lauck Oil Company Inc.
Lease Name Pichner Well No. 1
Office Address 301 South Broadway Wichita 2 Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed August 10 1950
Application for plugging filed August 10 1950
Application for plugging approved August 10 1950
Plugging commenced August 10 1950
Plugging completed August 10 1950
Reason for abandonment of well or producing formation

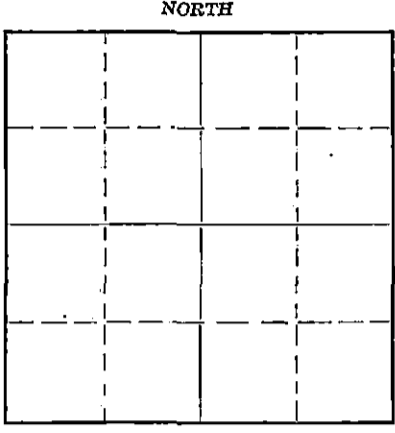

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Stough
Producing formation Depth to top Bottom Total Depth of Well 3364 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Arbuckle lime	water	3339	3364	10"	200'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Mud	3364	-	200'
Bridge	200	-	194'
Cement	194	-	174'
Mud	174	-	22 26
Bridge	22	-	22
Cement	22	-	6 to bottom of cellar

Aug 10 1950 08-18-50

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to D. R. Lauck Oil Company Inc.
Address 301 South Broadway Wichita 2 Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
P. R. Bishop (employee of owner) or (owner or operator) of the above-described well,


being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) P. R. Bishop
Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 17 day of August 19 50

My commission expires Sept. 14, 1951

Elizabeth Kay
Notary Public



PLUGGING
PER SEC-LT-16-R-111
BOOK PAGE 21 LINE 17

AUG 23 1950

Notary Public
 My commission expires Sept. 11, 1951.

M. G. HONERLIE
 Subscribed and sworn to before me this 17th day of August, 1950.

I hereby certify that this is a true and correct log of the above named well, to the best of my knowledge and belief.
 Dated at Wichita, Kansas, this 17th day of August, 1950.

3364	Total Depth
3339	Arbuckle
3310	Conglomerate
3014	White Limestone
2995	Brown Limestone
2895	Hobbs
Top - Barton Block	

Drill from east very slight blow for 4 minutes open 30 minutes 30' slight water out and 334-30 strong blow open 30 minutes 1100' water 900 lbs bottom hole pressure 3343
 3350
 Total Depth D & A

95	Shale & shells
80	sand
200	shale & shells
670	shale & shells
695	argillite
1030	shale & shells
1120	salt & shale
1315	shale & shells
2075	shale & lime
2190	shale
2200	shale & shells
2450	shale
2570	shale & lime
3246	lime

Pitcher No. 1
 Completed: July 30, 1950
 Casting: 10" 200' cemented 150 sacks
 Barton County Kansas
 Completed Aug. 10, 1950
 Elevation: 1044'

D. R. FAUCH OIL COMPANY INC.