

STATE OF KANSAS
STATE CORPORATION COMMISSION


15-009-01287-0000

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Barton County. Sec. 14 Twp. 16 Rge. 11 (E) (W)
Location as "NE/CNW'SW" or footage from lines E/2 W/2 SW/4
Lease Owner WILKINSON DRILLING, INC.
Lease Name Pichner Well No. 1
Office Address 1121 Union National Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) D & A
Date well completed October 27, 1957
Application for plugging filed October 26, 1957
Application for plugging approved October 26, 1957
Plugging commenced October 27, 1957
Plugging completed October 27, 1957
Reason for abandonment of well or producing formation No commercial quantity of oil and/or gas was encountered.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

NORTH



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well _____

Producing formation None Depth to top _____ Bottom _____ Total Depth of Well 3388 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Sand		120'	157'			
Sand		250'	300'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud, plug at 300 feet with 25 sacks cement, mud to 40'; set plug with 10 sacks cement.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor WILKINSON DRILLING, INC.
Address 1121 Union National Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Walter M. Wilkinson (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Walter M. Wilkinson


1121 Union National Bldg. - Wichita 2, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of November, 19 57

Caralyn F. Moore

Notary Public.

My commission expires January 2, 1961

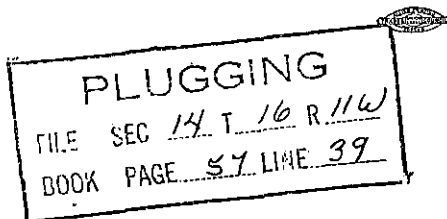

11-9-57

WILKINSON DRILLING INCORPORATED

1121 UNION NATIONAL BUILDING

WICHITA 2, KANSAS

PICHNER #1

Company	- Wilkinson Drilling, Inc.	Location:	E/2 W/2 SW/4, Section
Contractor	- Company Tools		14-16-11W, Barton
			County, Kansas.
Commenced	- 10-16-57	Casing:	21 Joints 8 5/8" set
Completed	- 10-27-57		@ 416.18'
Total Depth	- 3388'	Elevation:	1876' - D.F.

FIGURES INDICATE DEPTH OF FORMATIONS:

Depth	Formation
0 - 150	Clay & Sand Rock
150 - 320	Shale & Sand Streaks
320 - 410	Clay & Shells
410 - 690	Shale, Shells, & Red Beds
690 - 715	Anhydrite
715 - 1400	Shale & Shells
1400 - 2705	Shale & Lime
2705 - 3105	Lime & Shale
3105 - 3326	Lime
3326 - 3357	Chert & Shale
3357 - 3388	Dolomite
3388 - T. D.	

We hereby certify the above and foregoing to be a true and correct copy of the Log on the #1 Pichner, E/2 W/2 SW/4, Section 14-16-11W, Barton County, Kansas.

WILKINSON DRILLING, INCORPORATED

Walter M. Wilkinson
Walter M. Wilkinson

Subscribed and sworn to before me this 8th day of November, 1957.

PLUGGING
FILE SEC 14 T 16 R 11 W
BOOK PAGE 57 LINE 39

Carolyn J. Moore
Notary Public

My commission expires January 2, 1961.