


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittig Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH



Locate well correctly on above
Section Plat

Kingman County. Sec. 12 Twp. 30S Rge. 8 (E)W (W)
Location as "NE/CNW/SW" or footage from lines SW SW NE
Lease Owner Murphy Oil Company of Oklahoma, Inc.
Lease Name Young Well No. 2
Office Address 400 Midstates Building, Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed December 12, 1957
Application for plugging filed December 12, 1957
Application for plugging approved December 12, 1957
Plugging commenced December 12, 1957
Plugging completed December 12, 1957
Reason for abandonment of well or producing formation dry hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well J. M. Rives
Producing formation Depth to top Bottom Total Depth of Well 4250 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Red bed		0	283'	10-3/4"	283'	none

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy mud. Set wooden plug at 275', 1/2 sack hulls on top and filled to 40' with 30 sacks of cement. Set wooden plug at 40', 1/2 sack of hulls on top and filled to bottom of cellar with 12 sacks of cement. Welded iron cap on top of pipe.

RECEIVED
STATE CORPORATION COMMISSION
DEC 20 1957
12-20-57
CONSERVATION DIVISION
KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Barbour Drilling Company
Address 1612 First National Building, Tulsa 3, Oklahoma

STATE OF Oklahoma, COUNTY OF Tulsa, ss.
E. W. Pribyl (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. BARBOUR DRILLING COMPANY

(Signature) E. W. Pribyl
1612 First National Building, Tulsa 3, Oklahoma
(Address)

SUBSCRIBED AND SWORN TO before me this 18th day of December, 1957

My commission expires July 27, 1961


Merry Jane Burt
Notary Public.

PLUGGING
FILE SEC 12 T 30R 8W
BOOK PAGE 69 LINE 19

Print

YOUNG #2

SW SW NE Section 12-30S-8W
Kingman County, Kansas
Murphy Oil Company of Oklahoma, Inc.

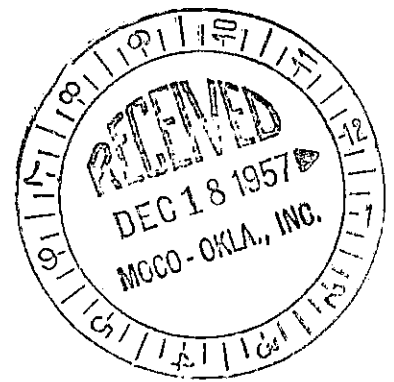

10-3/4" O. D. casing cemented at 283'

Drilling commenced November 28, 1957
Drilling completed December 12, 1957

FROM	TO	FORMATION	REMARKS
0'	200'	Red rock	
200	330	Red bed	10-3/4" O. D. casing cemented at 283'
330	1110	Shale & shells	
1110	1336	Shale & lime	
1336	1465	Shale & anhydrite	
1465	1565	Shale & lime shells	
1565	1665	Lime & shale	
1665	2050	Shale & lime	
2050	2245	Lime & shale	
2245	2460	Shale & lime shells	
2460	2590	Lime & shale	
2590	2730	Shale & lime streaks	
2730	2910	Shale & lime	
2910	3135	Lime & shale	
3135	3275	Shale & lime	
3275	3395	Sand	
3395	3455	Shale & lime	
3455	3534	Lime & shale	
3534	3865	Lime	
3865	3920	Lime & shale	
3920	4012	Lime	
4012	4100	Lime & shale	
4100	4153	Shale & lime	
4153	4163	Chat	
4163	4183	Chat (Mississippi)	
4183	4205	Chert & lime	
4205	4250	Lime	Well Plugged
T.D.	4250'		

PLUGGING
12 T 30 R 8 W
BOOK PAGE 69 LINE 19

This is a true copy of the driller's log as shown on the drilling tickets.

BARBOUR DRILLING COMPANY

By: *E.W. Griloy*

Subscribed and sworn to before me on this 17 day of December, 1957.

Mary Jane Burt
Notary Public

My commission expires July 27, 1961