

15-009-30489-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Barton County, Sec. 6 Twp. 16S Rge. (E)11 (W)
Location as "NE/CNW%SW%" or footage from lines SW NE NW
Lease Owner Three G Oil, Inc.
Lease Name ESFELD Well No. 1
Office Address 1101 Wichita Plaza, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed December 3, 19 66
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced December 3, 19 66
Plugging completed December 3, 19 66
Reason for abandonment of well or producing formation Dry Hole

NORTH

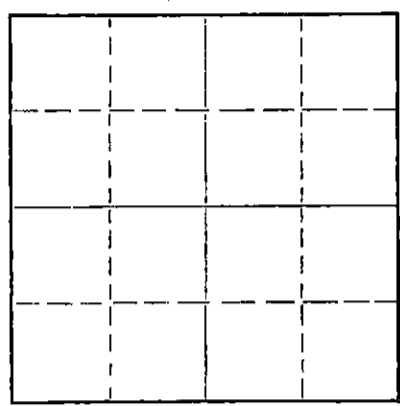

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes (Don Truan)

Name of Conservation Agent who supervised plugging of this well _____
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3361 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	419'	8-5/8"	11/24/66	-----
	Casing					

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Heavy Mud from Total Depth to 350 feet; 1/2 sack Halls, Plug and 25 sacks Cement thru the Drill Pipe; Mud to 40 feet; Halls, Plug bridged with Kelly and Cement to Base of Cellar; 2 sacks in Rat Hole. Job completed at 5:30 A.M.

RECEIVED
DEC 7 1966
12-7-66
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sage Drilling Co., Inc.
Address 500 Bitting Building, Wichita, Kansas

STATE OF KANSAS COUNTY OF SEDGWICK, ss.
Lawrence F. Gray of Sage Drilling Co (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Lawrence F. Gray
500 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 5th day of December, 1966

My commission expires November 26, 1970.

Louise K. Whitted
Louise K. Whitted
Notary Public.

15-009-30489-0000

DRILLERS LOG

ESFELD NO. 1

CASING RECORD:	COMPANY:	Three G Oil, Inc.	DESCRIPTION:
8-5/8" @ 419'	CONTRACTOR:	Sage Drilling Co.	Ap. SW NE NW
w/225 sax cement	COMMENCED:	November 24, 1966	Sec. 6-16S-11W
TOTAL DEPTH:	COMPLETED:	December 3, 1966	Barton County, Kansas
3361'			

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>
Surface Soil & Post Rock	0	40
Clay and Shale	40	275
Sand	275	385
Shale	335	385
Hard Sand	385	395
Shale	395	419
Sand	419	447
Shale, Shells & Red Bed	447	738
Anhydrite	738	768
Red Bed, Shale & Shells	768	1480
Lime & Shale	1480	2840
Lime	2840	2925
Shale & Lime	2925	3045
Lime	3045	3120
Lime & Shale	3120	3304
Chert & Shale	3304	3348
Lime	3348	3361

RECEIVED
STATE CORPORATION COMMISSION

DEC 7 1966

CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

SAGE DRILLING CO., INC.

By Lawrence F. Gray
Lawrence F. Gray

Subscribed and sworn to before me this 5th day of December, 1966.

Louise K. Whitted
Louise K. Whitted, Notary Public

My commission expires:
November 26, 1970