

STATE OF KANSAS  
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas

WELL PLUGGING RECORD

Kearney County. Sec. 32 Twp. 24 Rge. 38 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SW SW NE

Lease Owner Sooner Pipe & Supply Corporation

Lease Name Smalley "E" Well No. 1

Office Address Tulsa, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) \_\_\_\_\_

Date well completed \_\_\_\_\_ 19\_\_\_\_

Application for plugging filed \_\_\_\_\_ 19\_\_\_\_

Application for plugging approved \_\_\_\_\_ 19\_\_\_\_


Plugging commenced 3-16-66 \_\_\_\_\_ 19\_\_\_\_

Plugging completed 3-20-66 \_\_\_\_\_ 19\_\_\_\_

Reason for abandonment of well or producing formation Depleted.

If a producing well is abandoned, date of last production \_\_\_\_\_ 19\_\_\_\_

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

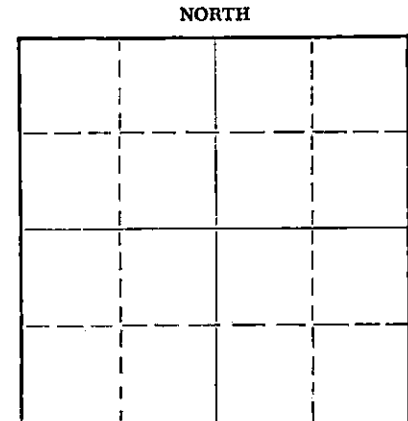

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Hugh Scott Ed Eves

Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 2507 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				<del>8-5/8"</del>		
				8-5/8"	550'	None
				5-1/2"	2465'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Pumped 50 sacks of cement to well on 3-16-66 and closed well in. Checked well on 3-18-66. Well still gassing. Pumped 20 sacks of gel mud and 100 sacks of cement to well on 3-19-66. Checked well on 3-20-66. Well killed.

RECEIVED  
MARCH 25 1966

PLUGGING COMPLETE.

CONSERVATION DIVISION  
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
Noel J. Knight (employee of owner) or (owner) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 24th day of March, 1966

Milton J. Volin  
Notary Public.

My commission expires May 20, 1968

PR-

FORMATION RECORD

15-093-00383-0000

Nature of Strata	Color	Top	Bottom	Straight Hole tests	Remarks
Surface sand		0	55		
Sand & clay		55	340		
Sand & shale		340	495		
Red bed	Red	495	683	500' OK	
Red Bed & shale		683	1050	1000' OK	
Salt, shale & sand		1050	1178		
Salt & shale		1178	1480		
Salt, shale & anhydrite		1480	1705	1500' OK	
Shale & sand		1705	1884		
Shale	Red	1884	2100	2000' OK	
Shale & lime		2100	2182		
Anhydrite & shale		2182	2249		
Lime broken	Brown	2249	2260		Hollenberg lime
Shale & lime		2260	2321		
Lime	Brown	2321	2329		Herrington lime
Shale & broken lime		2329	2334		
Lime	Brown	2334	2340		Krider lime
Shale & broken lime		2340	2368		
Lime	Brown	2368	2384		Winfield lime

RECEIVED  
 STATE CORPORATION COMMISSION  
 NOV 1 1965  
 CONSERVATION DIVISION  
 Wichita, Kansas

H.A. Smalley E #1  
 Sec. 32-24-38  
 SW SW NE Kearney Co

