


DISTRICT CONSERVATION AGENT'S REPORT

15-009-07191-0000

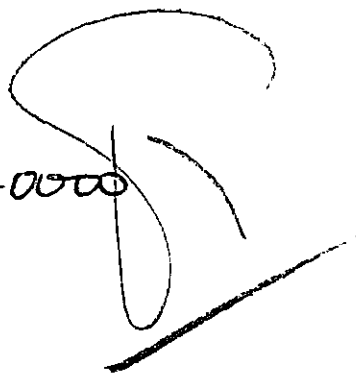

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. NE SE SW

LOCATION ~~NE-SW-SW~~

SEC. 8 TWP. 16 RGE. 11-w

Dry Hole _____ Abandoned Oil Well X Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 3 Lease New

Operator Lewis Drilling Co. Address 607 N. N. Blk. Bldg. Wichita-Kans.

Field _____ County Barton

Total Depth 3392 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/8 - 190 ft. Circulated with cement
5 1/2" casing set at 3362 ft. Cemented with 125 sacks cement.
Plugged back to 3000 ft with Lane Wells Plug & Chat
Dumped 5 sacks of cement at 3000 ft - Shot off &
pulled the 5 1/2" casing - mud to 190 ft. Set Rock
Bridge & 15 sacks of cement at 190 ft. mud to
30 ft. Plug & 10 sacks of cement at the
Surface

RECEIVED
STATE CORPORATION COMMISSION
District Conservation Agent
C. H. Stough

4-4-51
APR - 4 1951

Date 4-1-51

PLUGGING
FILE SEC 8 T 16 R 11
BOOK PAGE 71 LINE 18

CONSERVATION DIVISION
Wichita, Kansas

