

15-097-20112-0009

STATE OF KANSAS  
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
212 No. Market  
Wichita, Kansas 67202

WELL PLUGGING RECORD

Kiowa County, Sec. 8 Twp. 30 Rge. 18 (E) (W)X  
Location as "NE/CNW/SW" or footage from lines C SE SW  
Lease Owner Graves Drilling Co., Inc.  
Lease Name Parkin Well No. #1  
Office Address 505 Union Center Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 6-3-71 19  
Plugging completed 6-7-71 19  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

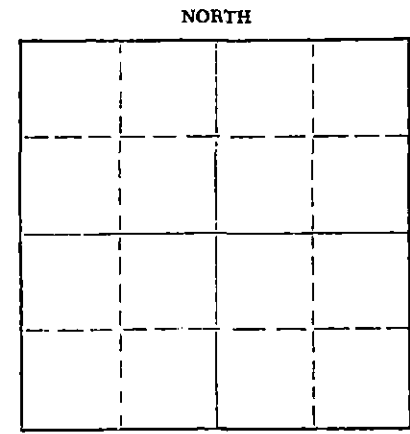

Locate well correctly on above  
Section Plat

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein  
Producing formation Depth to top Bottom Total Depth of Well 5100' Feet  
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	5100'	3609.90'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Made bottom hole plug back with sand to 4980'. Mixed and ran 5 sacks cement thru dump bailer.  
Mudded hole to 320' - set 20' rock bridge. Filled hole with 5 yards ready-mix to base of cellar.



(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Southwest Casing Pulling Co.  
Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.  
Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec.  
Box 364 Great Bend, Kansas (Address)



Subscribed and Sworn to before me this 8 day of June, 1971.  
Sidney D. Miller Notary Public.

# Graves DRILLING CO. INC.

PHONE  
AMherst 5-7233

505 Union Center  
WICHITA, KANSAS 67202  
May 27, 1971

RECEIVED  
STATE CORPORATION COMMISSION  
JUN 1 1971  
CONSERVATION DIVISION  
Wichita, Kansas

## ROTARY DRILLING LOG OWWO

LEASE OWNER: Graves Drilling Co., Inc.  
505 Union Center  
Wichita, Kansas

COMMENCED: 5-13-71

CONTRACTOR: Garvey Drilling Co.  
300 W. Douglas  
Wichita, Kansas


COMPLETED: 5-14-71

DESCRIPTION: Parkin # 1  
Sec. 8-30S-18W  
C SE SW  
Kiowa County, Ks.


-----  
Washdown to T. D. 5100 feet

Run casing 5064', 100 sacks cement, perforate  
4991 to 97', acidize 500, frac. 10,000# sand,  
swab 25 bbl. water per hour. D & A

I hereby certify the above to be correct to the best of my knowledge.

  
\_\_\_\_\_  
John C. Graves, President

My commission expires July 28, 1974

  
\_\_\_\_\_  
Mary Ann Scott, Notary Public