


WELL PLUGGING RECORD

Give All Information Completely.
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

NORTH

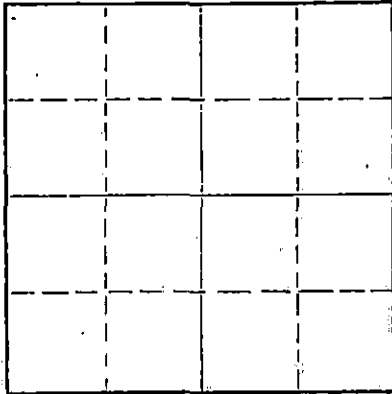

Locate well correctly on above
Section Plat

Russell County. Sec. 15 Twp. 14 Rge. 12 (E) W (W)

Location as "NE/CNW/SW" or footage from lines NW/4 SE/4 NE/4

Lease Owner Wylliah O. Gaskill

Lease Name Beisel "A" Well No. 1

Office Address 633 Beacon Building, Tulsa 3, Oklahoma

Character of Well (completed as Oil, Gas or Dry Hole) Dry hole

Date well completed March 13 1964

Application for plugging filed March 13 1964

Application for plugging approved March 13 1964

Plugging commenced March 13 1964

Plugging completed March 14 1964

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3,290 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	210'	Cmtd w/150 sax

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fill w/heavy mud to 210'
Set bridge plug @210' w/ 1/4 sax hulls on plug
Dump 20 sax cement on plug thru 4 1/2" drill pipe
Fill w/heavy mud to 40'
Set bridge plug @ 40' w/ 1/2 sax hulls on plug
Dump 10 sax cement on plug to cellar
Dump 2 sax cement down rathole.

RECEIVED
STATE CORPORATION COMMISSION

MAR 23 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Shields Drilling Company, Inc.
Address Shields Building, Russell, Kansas

STATE OF Kansas, COUNTY OF Russell, ss.
R. L. Shields Contractor
(Employee of Owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) R. L. Shields, v. pres.

Shields Building, Russell, Kansas

SUBSCRIBED AND SWORN TO before me this 18th day of March, 1964

My commission expires January 31, 1968

Agnes M. Appel
Notary Public.




Shields

Russell, Kansas

WELL LOG

Operator: Twyllah O. Gaskill
 Well: Beisel "A" #1
 Commenced: March 6, 1964
 Completed: March 14, 1964
 Contractor: Shields Drilling Company, Inc.

Well Description: NW/4 SE/4 NE/4
 Sec. 15-14S-12W
 Russell County, Kansas



CASING RECORD		
Size	Run	Pulled
8 5/8"	210'	Cmtd w/150 sax

Elevation:
 Treatment:

Production:

Tops:

RECEIVED
 STATE CORPORATION COMMISSION

MAR 23 1964

CONSERVATION DIVISION
 Wichita, Kansas

..... Figures Indicate Bottom of Formations

Surface soil, shale	210'
Shale, shells & redbed	657'
Anhydrite	691'
Shale, shells, salt & lime	1350'
Shale & lime	2555'
Lime	2725'
Lime & chert	2785'
Lime & shale	2875'
Lime	3290' RTD

Notes

DST #1 3,064'-3,125' Tool open 30 min. Very weak blow for 3 min.
 Recovered 90' slightly watery mud.
 IBHP-1008#, IFP-27#, FFP-73#, FEHP-944#/20 min.