

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-075-20159-00-00
Spot: CNESW Sec/Twnshp/Rge: 17-24S-40W
1980 feet from S Section Line, 1980 feet from E Section Line
Lease/Unit Name: MORRELL Well Number: 1
County: HAMILTON Total Vertical Depth: 2400 feet

Operator License No.: 32334
Op Name: CHESAPEAKE OPERATING, INC.
Address: PO BOX 18496 6200 N WESTERN AVE.
OKLAHOMA CITY, OK 73154

Conductor Pipe: Size feet: 878.00
Surface Casing: Size 8.625 feet: 326 WITH 325 SX CMT
Production: Size 4.5 feet: 2398 WITH 500 SX CMT
Liner: Size feet:

Well Type: GAS UIC Docket No: Date/Time to Plug: 01/24/2003 9:45 AM

Plug Co. License No.: 99996 Plug Co. Name: ALLIED CEMENT COMPANY

Proposal Rcvd. from: DENNIS FRICK Company: CHESAPEAKE OPERATING Phone: (405) 848-8000

Proposed Plugging Method: PUMP 5 SX HULLS TO PLUG, 140 SX 60/40 POZ, MIX W/6% GEL, PRESSURE UP BACKSIDE (8-5/8" - 4-1/2") & PUMP 50 SX DOWN ANNULUS IF NEEDED.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 01/24/2003 10:50 AM .KCC Agent: KEVIN STRUBE

Actual Plugging Report:


PERFS AT 2316-28'. PUMPED DOWN 4 1/2" CASING 500# HULLS & 115 SX CMT. MAXIMUM PRESSURE 1000#. SHUT IN PRESSURE 1000#. PUMPED DOWN 8 5/8" X 4 1/2" ANNULUS, 10 SX CMT. MAXIMUM PRESSURE 500#. SHUT IN AT 500#.

RECEIVED
JAN 30 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. NO CASING RECOVERED.

Plugged through: CSG

District: 01

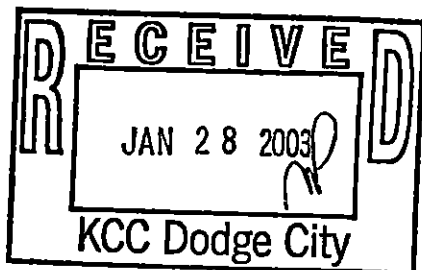

Signed

Kevin D. Strube

(TECHNICIAN)

INVOICED

DATE 1-30-03

WV. NO. 2603061127

[Signature]