

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-185-20517-00-00
Spot: CSWNE Sec/Twnshp/Rge: 19-24S-15W
1980 feet from N Section Line, 1980 feet from E Section Line
Lease/Unit Name: STEWART Well Number: 1
County: STAFFORD Total Vertical Depth: 4478 feet

Operator License No.: 31629
Op Name: NASH OIL & GAS, INC.
Address: P. O. BOX 8747
PRATT, KS 67124

Conductor Pipe: Size feet: 8 1/4 5.54
Surface Casing: Size 8.625 feet: 239 WITH 225 SX CMT
Production: Size 5.5 feet: 4306 WITH 150 SX CMT
Liner: Size feet:

Well Type: OK GAS UIC Docket No: Date/Time to Plug: 12/23/2002 9:00 AM
Plug Co. License No.: 31529 Plug Co. Name: MIKE'S TESTING & SALVAGE, INC.
Proposal Rcvd. from: MONTE ANDREWS Company: MIKE'S TESTING & SALVAGE, INC Phone: (620) 938-2537

Proposed Plugging Method: SAND BACK TO 3800' & 5 SX CMT. 1ST PLUG AT 1000' WITH 12 SX GEL & 50 SX CMT. 2ND PLUG AT 270' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

Plugging Proposal Received By: STEVE PFEIFER Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 12/23/2002 11:15 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:


PBTD 3910'. PERFS AT 3875-83'. SANDED TO 3800' & 5 SX CMT. PUMP PLUGS THROUGH CASING. 1ST PLUG AT 1000' WITH 12 SX GEL - 50 SX CMT. 2ND PLUG AT 270' WITH 50 SX CMT. 3RD PLUG AT 40' WITH 20 SX CMT.

RECEIVED
DEC 31 2002
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2210' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

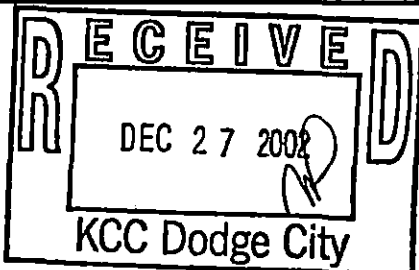

Signed Richard M. Lacey

(TECHNICIAN)

INVOICED

DATE 12-31-02

INV. NO. 2003061006

Form 01-2B