


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

~~NW~~ Kingman County, Sec. 16 Twp. 30S Rge. 8W (E) (W)

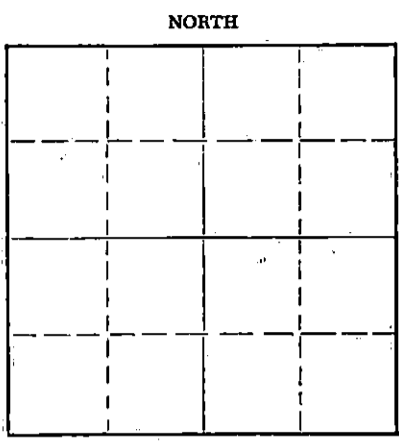

Locate well correctly on above Section Plat

Location as "NE/CNW/SW" or footage from lines NWSWNW
Lease Owner Bachus Oil Company
Lease Name Wells Well No. # 2
Office Address 721 East Central Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Gas Well
Date well completed _____ 19____
Application for plugging filed yes 19____
Application for plugging approved yes 19____
Plugging commenced 3-1-60 19____
Plugging completed 3-7-60 19____
Reason for abandonment of well or producing formation
No longer producing in commercial quantities
If a producing well is abandoned, date of last production January 1960
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Fred Hampel
Producing formation Miss. Depth to top 4181 Bottom 4246 Total Depth of Well 4246 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	4245	3486'
				8-5/8"	287	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Plugging commenced 3-1-60. Plugging completed 3-7-60. Measured into total depth: Plugged off bottom; Sanded up to 4160' and dumped 5 sacks of cement, 4160'-4183'. Worked and shot pipe. Shot 5 1/2" casing at 3486'. Pulled and laid down casing. Plugged hole with mud to 280'. Set 10' rock bridge and dumped 20 sacks of cement, 270'-~~270~~'. Mudded hole to 35'. Set rock bridge and capped the well with 10 sacks of cement.

RECEIVED
STATE CORPORATION COMMISSION
MAR 14 1960
3-14-60
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor J. O. Forbes d/b/a Forbes Casing Pulling Company
Address Box 221, Great Bend, Kansas

STATE OF Kansas COUNTY OF Barton, ss.
J. O. Forbes (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J. O. Forbes
J. O. Forbes
Box 221, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 11th day of March, 1960

My commission expires December 8th, 1963.
Kayann Jenkins
Notary Public.

ROTARY DRILLING LOG

OPERATOR: Sachs Oil Company
Wells No. 2
NW SW NW Section 16-30S-0W,
Kingman County, Kansas

CONTRACTOR: Prime Drilling Company
COMM: 2/13/57
COMP: 2/28/57

Remarks: Set 8-5/8" surface casing
at 287' cemented with 200 sacks
Pozmix, 2% C.C.

Formations:

Red Bed & Shale	150'
Red Rock & Shale	288'
Red Bed, Shale & Shell	975'
Shale & Shells	998'
Anhydrite & Shale	1035'
Shale & Salt	1300'
Shale & Lime	1455'
Sandy Lime & Shale	1590'
Lime	1895'
Lime & Shale	2300'
Broken Lime & Shale	2455'
Shale & Lime	2835'
Broken Lime	2935'
Lime & Shale	3075'
Lime	3165'
Lime w/Shale Streaks	3240'
Lime & Shale	3330'
Lime, Shale & Sand	3360'
Sand & Shale	3440'
Lime	3615'
Lime w/Shale Streaks	3661'
Lime	4180'
Chert	4205'
Chert & Lime	4225'
Lime	4246'
Rotary Total Depth	4246'

APR 14 1960
REGISTRATION DIVISION
Kansas

Set 5-1/2" oil string at 4245' cemented
with 125 sacks common cement.

We certify the above log is true and
correct to the best of our knowledge
and belief.

PRIME DRILLING COMPANY

R. R. McNicol
R. R. McNicol