


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County. Sec. 30 Twp. 24S Rge. 15 R/W  
Location as "NE/CNW $\frac{1}{4}$ /SW $\frac{1}{4}$ " or footage from lines  
C SW SE

Lease Owner The Roxana Corporation  
Lease Name Seibert "B" Well No. 1  
Office Address Box 1162, Great Bend, Ks. 67530  
Character of Well (Completed as Oil, Gas or Dry Hole) Dry hole



Date Well completed Apr. 7 1981  
Application for plugging filed Apr. 7 1981  
Application for plugging approved Apr. 7 1981  
Plugging commenced Apr. 7 1981  
Plugging completed Apr. 7 1981  
Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Morris Lesslie  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 4511'  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	288'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug-set.

1st plug @ 520' w/ 50 sks.  
2nd plug @ 280' w/ 30 sks.  
3rd plug @ 40' w/ 10 sks.  
10 sks in rat hole

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor RoCo Drilling, Inc.

STATE OF Ks. COUNTY OF Barton, ss.  
Richard L. Miller (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Richard L. Miller  
1925 Main, Great Bend, Ks 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 10 day of April, 1981

My commission expires February 28, 1983

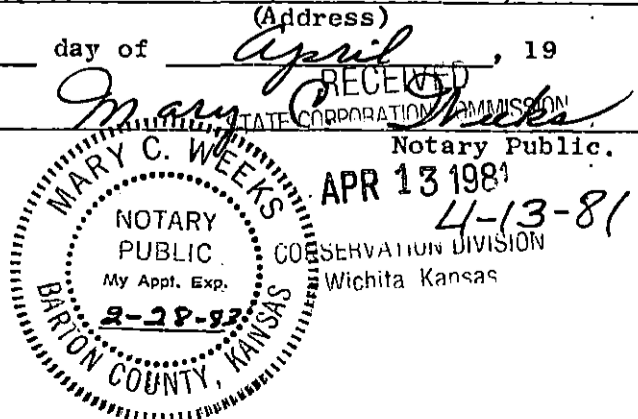

15-185-21251-0000

ROCO DRILLING, INC.

GREAT BEND, KANSAS 67530

P. O. BOX 11  
1819 ELEVENTH STREET  
TELEPHONE (316) 792-1383

DRILLERS WELL LOG

Seibert "B" #1  
C SW SE, Section 30-24S-15W  
Stafford County, Ks

Operator: The Roxana Corporation  
Box 1162  
Great Bend, Kansas 67530

Date Commenced: March 31, 1981  
Date Completed: April 7, 1981

Elevation: 2050' K.B.  
Total Depth: 4511'  
D&A

Casing: 8 5/8" @ 288' w/ 225 sks.

<u>DEPTH</u>		<u>FORMATION</u>
<u>FROM</u>	<u>TO</u>	
0	1036	Shale, Red Bed & Sand
1036	1054	ANHYDRITE
1054	2130	Shale, Shells & Gyp.
2130	3677	Lime, Shale & Sand
3677	3682	HEEBNER SHALE
3682	3815	Lime, Shale & Sand
3815	4222	Lime & Shale
4222	4296	Lime, Shale & Chert
4296	4334	MISSISSIPPI CHERT
4334	4438	Chert, Sand & Shale
4438	4511	Chert, Lime & Shale
	4511	Rotary Total Depth

I, Richard L. Miller, certify this is a correct copy of the Driller's Log from the well drilled at the above location, to the best of my knowledge and belief.

Signed Richard L. Miller  
Richard L. Miller

RLM: cn