


WELL PLUGGING RECORD

All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

15-167-08603-00-00

NORTH

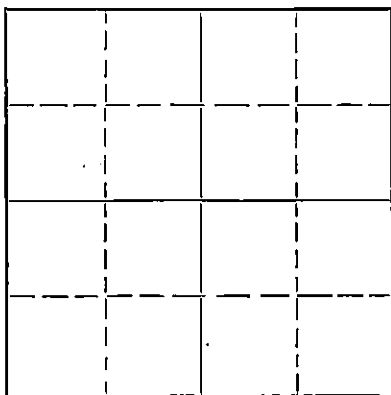

Locate well correctly on above
Section Plat

Russell County, Sec 17 Twp 15S Rge. 13W (E) (W)
Location as "NE/CNW 1/4 SW 1/4" or footage from lines C-S 1/2 - N 1/2 - SW 1/4
Lease Owner The Carter Oil Company
Lease Name L. Sellens Well No. 1
Office Address Box 786, Great Bend, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 6/3/59 June 3 19 39
Application for plugging filed July 13 19 53
Application for plugging approved July 14 19 53
Plugging commenced July 15 19 53
Plugging completed July 18 19 53
Reason for abandonment of well or producing formation Subsurface mechanical difficulties.
If a producing well is abandoned, date of last production April 23, 19 52
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Eldon Petty
Producing formation Arbuckle Depth to top 3224 Bottom 3226 Total Depth of Well 3226 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				10-3/4	239'	0
				4 1/2	3248'	1289'
Topeka		2610'	2620'			
Kansas City		2985 1/2'	3007'			
Arbuckle		3224'	3226'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with mud from 3226 to 3162.
Baker Plug from 3162 to 3160.
Calseal from 3160 to 3109.
Cement from 3109 to 3016.
Cement from 3016 to 2930.
PLUG 4 1/2" Halliburton from 2930 to 2928.
Mud from 2928 to 250'.
Rock from 250 to 248.
Cement from 248 to 208.
Mud from 208 to 20.
Cement from 20 to 0.

Filled hole with mud to 250', set rock bridge, dumped 20 sack cement. Top of cement, 210'. Filled hole with mud to 20', dumped 10 sack cement for gap.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J. & M. Casing Pulling
Address Box 711, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
P. C. Cottrell (employee of owner) or (owner/operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) P. C. Cottrell

Box 786, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 21st day of October, 1953.

W. L. Peterson
Notary Public.

My commission expires May 4, 1957.

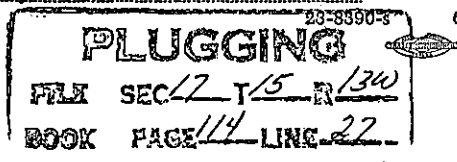

10-22-53