

15.167.30149.00.00


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Russell County, Sec. 17 Twp. 15 Rge. 15 (E) (W)

Location as "NE/CNW%SW%" or footage from lines C SW NW SE
Lease Owner Helmerich & Payne, Inc.
Lease Name Foster Estate Well No. 1
Office Address Box 558, Garden City, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12-1-65 19
Application for plugging filed 12-1-65 19
Application for plugging approved 12-1-65 19
Plugging commenced 12-1-65 19
Plugging completed 12-2-65 19
Reason for abandonment of well or producing formation Dry Hole

NORTH

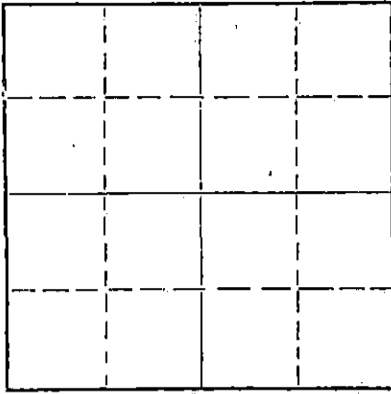

Locate well correctly on above
Section Flat

If a producing well is abandoned, date of last production - 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Don Truan Russell, Kansas
Producing formation - Depth to top - Bottom - Total Depth of Well 3407 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|--------------|------|------|--------|--------|------------|
| | surface pipe | 4' | 239' | 8-5/8" | 239' | None |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3407' to 600' Heavy Rotary Mud
600' to 540' Plug & 20 sacks cement
540' to 220' Heavy Rotary Mud
220' to 145' Plug & 25 sacks cement
145' to 45' Heavy Rotary Mud
45' to 4' Plug & 12 sacks cement
4' to 0 cellar

PLUGGING COMPLETED 1:15 AM November 2, 1965

RECEIVED
STATE CORPORATION COMMISSION

DEC -7 1965

12-7-65

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Gabbert & Jones Drilling Co.
Address 514 Orpheum Bldg, Wichita, Kansas


CONSERVATION DIVISION
Wichita, Kansas

STATE OF Kansas, COUNTY OF Finney, ss.
C. A. Richter (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. A. Richter

Box 558, Garden City, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 2 day of November, 1965



July 1968

Notary Public.

Robert N. Boyd
Robert N. Boyd