


Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

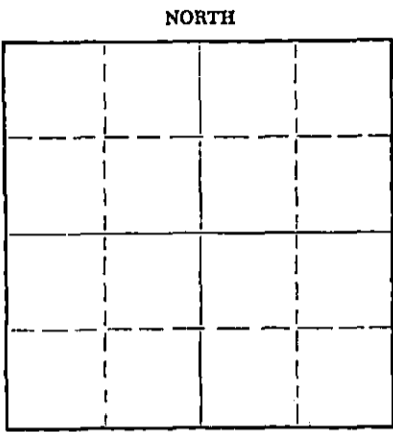

Locate well correctly on above Section Plat

Russell County, Sec. 27 Twp. 15 Rge. 15W (E) (W)  
Location as "NE/CNW&SW" or footage from lines SE SE NW  
Lease Owner Rudy Herman Oil Operations  
Lease Name Dupler Well No. 1  
Office Address Box 348 Russell, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) D&A  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 19  
Plugging completed April 9, 1961  
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Donald Truan  
Producing formation Depth to top Bottom Total Depth of Well 3405' Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	IDENTIFIED FROM	TO	SIZE	PUT IN	PULLED OUT
	STATE CORPORATION COMMISSION				
	MAR 29 1966	3-29-66			
	CONSERVATION DIVISION Wichita, Kansas				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

8 5/8" 198' CWC.  
Filled hole with heavy mud to 220' plug, 1/2 sax hulls, & displaced 25 sax cement thru drill pipe. Mud to 40' 1/2 sax hulls, plug, 10 sax cement cementing to base of cellar.

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Leo J. Drilling & Sons Drilling Co.  
Address Victoria, Kansas

STATE OF \_\_\_\_\_, COUNTY OF \_\_\_\_\_, ss.  
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Rudy A. Herman  
(Address)

SUBSCRIBED AND SWORN TO before me this 28th day of March, 1966

My commission expires January 15, 1969  
Notary Public.

13.167.00507.00. COPY


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- RUDY HERMAN OIL OPERATIONS  
Farm- Dumlér No. 1

SEC. 27 T. 15 R15W  
SE SE NW

Total Depth. 3405'  
Comm. 4-1-61 Comp. 4-10-61  
Shot or Treated.  
Contractor. Leo J. Drilling & Sons  
Issued. 7-1-61

County Russell  
KANSAS



CASING:  
8" 200'

Elevation. 1910' RB

Production. Dry

Figures indicate Bottom of Formations.

COMPLETE DRILLERS LOG NOT AVAILABLE:

3152-3160' dense, off-white crystalline  
lime w/rare drk staining in  
poor pin-point porosity. No  
odor or free oil. Not worthy  
of testing.

3177-79' mealy & fossiliferous white  
lime w/rare stain & poor  
fossiliferous porosity. No  
odor or free oil.

3188-92' white, mealy & fossiliferous  
lime w/no show of oil or gas.

Rotary Total Depth 3405

TOPS:  
Anhydrite (scout) 945  
Topeka Lime 2859  
Heebner Shale 3089  
Toronto Lime 3110  
Lansing-Kansas City 3152  
Conglomerate 3382

RECEIVED  
STATE CORPORATION COMMISSION  
JUL 16 1964  
CONSERVATION DIVISION  
Wichita, Kansas