


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

NORTH

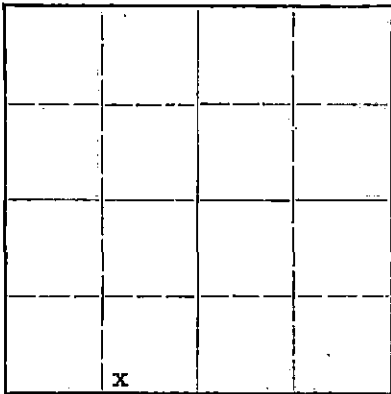

Locate well correctly on above
Section Plat

Stafford County. Sec. 13 Twp. 24 Rge. II (E) W. (W)
Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW-SE-SW
Lease Owner MABEE OIL & GAS CO.
Lease Name Ira Johnson Well No. 7
Office Address Box # 28 Zenith, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil & Gas
Date well completed II-14 19 38
Application for plugging filed Aug. 22, 19 45
Application for plugging approved Aug. 23, 19 45
Plugging commenced Sept. 18, 19 45
Plugging completed Sept. 26, 19 45
Reason for abandonment of well or producing formation Oil exhausted

If a producing well is abandoned, date of last production July 1, 19 45
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well H.M. Kerr
Producing formation Viola Lime Depth to top 3,801 Bottom 3,820 Total Depth of Well 3,820 Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lansing Lime		3,398	3,410			
Misener	Oil & Gas	3,796	3,801			
Viola Lime	Oil & Gas	3,801	3,820	7" O.D.	3,789'	2,777'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

10 Sacks cement from 3,820 to 3,787
Heavy mud from 3,787 to 250'
Set rock bridge and 15 sacks cement from 250' to 15'
10 Sacks cement from 15' to cellar for cap.

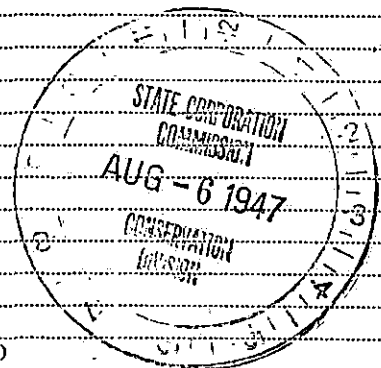

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to MABEE OIL & GAS CO.
Address Box # 28 Zenith, Kansas

STATE OF Kansas, COUNTY OF Stafford, SS.

H.A. Marks (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H.A. Marks

Box 28 Zenith, Kansas (Address)

SUBSCRIBED AND SWORN to before me this 1 day of Aug, 19 47

My commission expires April 6 - 1951

21-6858-RS 2-47-6M

J. E. Wainwright

Notary Public.

