


15. 167. 04208. 00. 00

DISTRICT CONSERVATION AGENT'S REPORT

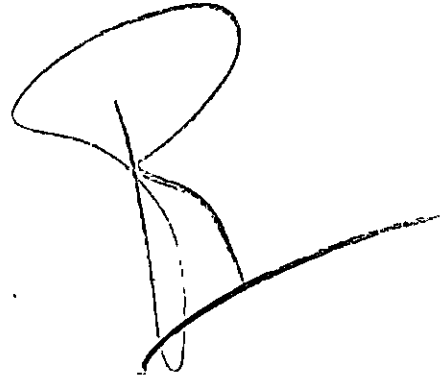

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION CW $\frac{1}{2}$ W $\frac{1}{2}$ SW $\frac{1}{2}$

SEC. 20 TWP. 15 RGE. 13 W

Dry Hole Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. C-2 Lease Geo Sellens

Operator Jones-Shelburne-Farmer Address Russell, Kans

Field Trapp County Russell

Total Depth 3285 Feet.

(Describe briefly the manner in which the well was plugged)

5 $\frac{1}{2}$ " at 3256' with 75 sax cement behind. perforated at
3010' squeezed with 50 sax cement.

Pulled 2900' 5 $\frac{1}{2}$ ", filled hole with heavy mud to 200',
set rock bridge and 25 sax cement, filled with heavy mud
to 30', set rock bridge and 20 sax cement to bottom cellar.

RECEIVED

Conservation Div.

PLUGGING
SEP 20 15 13
STATE CORPORATION
WICHITA, KANSAS

9-16-50

J. Edward Petty
District Conservation Agent

Date 9-14-50

F