

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-155-01019-00-01
Spot: NENENE Sec/Twnshp/Rge: 27-24S-8W
4950 feet from S Section Line, 330 feet from E Section Line
Lease/Unit Name: FOSTER Well Number: 2
County: RENO Total Vertical Depth: 4300 feet

Operator License No.: 30080
Op Name: HONEY OIL CO., INC.
Address: 8526 BOXTHORN
WICHITA, KS 67226

Conductor Pipe: Size feet: \$139.75
Surface Casing: Size feet: 260
Production: Size 5.5 feet: 4300 175 SX CMT
Liner: Size feet:

Well Type: SWD UIC Docket No: D26828.0 Date/Time to Plug: 12/13/2001 1:00 PM
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.
Proposal Rcvd. from: JOE MACE Company: QUALITY WELL SERVICE Phone: (620) 727-3410

Proposed Plugging Method: Sand to 4250'-5sxs, 1250'-35sxs, 750'- 35sxs, 265'-0'.

Plugging Proposal Received By: JACK LUTHI WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 12/13/2001 1:00 PM KCC Agent: JACK LUTHI

Actual Plugging Report:

Sanded bottom to 4241' and 5sxs of common shot 5 1/2" casing off at 2820. Pulled to 1250' and pumped 35sxs, pulled to 750', pumped 35sxs, pulled to 265' circulated cement to 0'.

RECEIVED
KCC DISTRICT #2

DEC 19 2001

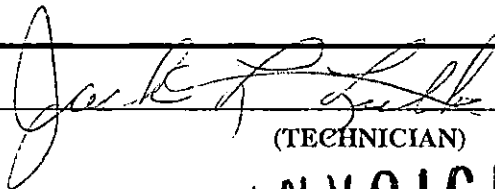
WICHITA, KS

Remarks: UNITED # 3263 60/40 5%

Plugged through: CSG

District: 02

Signed


(TECHNICIAN)

INVOICED

DATE 12-28-01

INV. NO. 2002061095